



### Features


- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 250mm.
- Besa mounting box compatible, hole distance 51mm.
- DualTone functionality enables switch between 3000K and 4000K colour temperatures.
- Power 12W, output 1025 lumens (4000K). Non-dimmable.
- IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50.

### Product Overview


<b>Product name</b>	START Surface IP44 1025lm 830/840 DualTone
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting
<b>E-number FI</b>	4170569
<b>Fixture luminous flux (lm)</b>	1025
<b>Luminaire efficacy (lm/W)</b>	85
<b>Light colour</b>	Warm White or Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	6
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	12
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	High (>40%)
<b>Housing colour</b>	White
<b>IP rating</b>	IP44
<b>IK rating</b>	IK03
<b>Product EAN number</b>	5410288434261
<b>Warranty</b>	3 years

Light your world

## Photometry

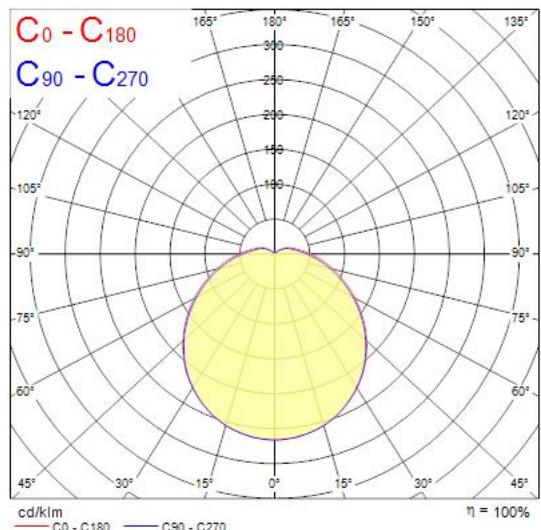

## Technical drawings

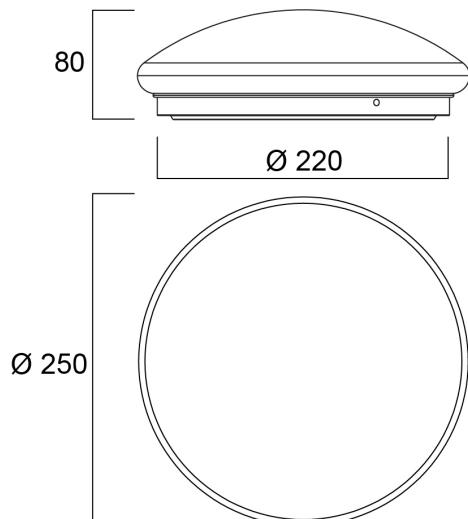

Light your world