

RANA LINEAR R 3KLM WW LOUVV+PRI

Item No: 0052355




PRO



Ceiling recessed LED Linear luminaire with Louvre + Micro Prismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, Warm White LED (3000K), 3200lm, 27W, 119lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<19, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type

Technical Assets


Dimensions (mm)

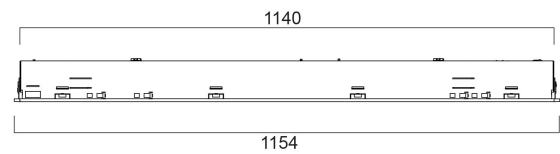

Photometrics

Distance [m]	Cone diameter [m]	E (lm)	E (cd)	E (cd)
0.5	0.95 0.68	8074 1887	43.4° 34.1°	2001
1.0	1.90 1.36	2019 596	43.4° 34.1°	875
1.5	2.84 2.03	897 174	43.4° 34.1°	365
2.0	3.78 2.71	505 99	43.4° 34.1°	144
2.5	4.73 3.38	323 63	43.4° 34.1°	92
3.0	5.67 4.06	224 44	43.4° 34.1°	54

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 68.2°)
C90 - C270 (Half beam angle: 58.9°)



RANA LINEAR R 3KLM WW LOUV+PRI

Item No: 0052355



General data

Product name	RANA LINEAR R 3KLM WW LOUV+PRI
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Internal
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	-25°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Useful luminous flux (Φuse)	3200
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	118.51
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	27
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 13A C Breaker	36
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	56
Max. products per 10A B Breaker	17
Max. products per 13A B Breaker	22
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	34
Connectable conductor cross section - Min (mm²)	2.5
Connectable conductor cross section - Max (mm²)	2.5

RANA LINEAR R 3KLM WW LOUV+PRI

Item No: 0052355



Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000
Lifespan L90 B20	60000
Lifespan L90 B10	60000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Matt
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.05
Recessed Depth (mm)	90

Packaging

Product EAN number	5410288523552
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (inner)	5410288523552
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-25-40