


Adaptive Evacuation – Luminaires


GuideLed DX 11021, 11022, 11023, 11024 CG-S



GuideLed DX 11021 CG-S



Dimensions in mm



GuideLed DX 11021, 11022, 11023, 11024 CG-S


- Escape sign luminaire with LED Lightguide technology for wall-mounting
- Additional function: Displaying a red 'X' to signify an area as closed or blocked
- **DX: activation via a switching input on the supply module e.g. smoke detector or panic switch via potential free contact**
- For adaption to the respective ambient conditions, the power supply module is equipped with different selectable operating modes, e.g. static or flashing red 'X' Very good perceptibility on account of high luminance of the white contrasting colour
> 500 cd/m² in keeping with standard ISO 3864-1 and high uniformity L_{min}/L_{max} > 0.8
- Reduced battery costs on account of especially low power consumption
- Minimum service requirement due to high service life of the LEDs (50,000 hours)
- Without power supply: still visible pictogramm

Viewing distance	30 m
Luminous Φ_e/Φ_N at the end of rated operating time (EBLF)	100 %
Housing material	PC, PMMA
Housing colour	Light grey RAL 7035
Weight	0.99 kg (11021 LED CG-S) 1.08 kg (11022 LED CG-S) 1.26 kg (11023 LED CG-S) 1.38 kg (11024 LED CG-S)
Type of mounting	Ceiling, suspended, recessed installation
Connection terminal	Mains 3 x 2 x 2.5 mm ² Switch input 2 x 2 x 1.5 mm ²
Connection voltage	220 - 240 V AC, 50/60 Hz 176 V - 275 V DC
Current consumption - battery operation (220 V)	one-sided 12 mA two-sided 17 mA
Power consumption mains operation (apparent power / effective power)	one-sided 5.9 VA / 3.1 W two-sided 7.6 VA / 4.3 W
Inrush current	1.5 A
Permissible ambient temperature	-20 °C to +40 °C
Light source	LED batten

GuideLed DX 11022 / 11023 CG-S



Dimensions in mm

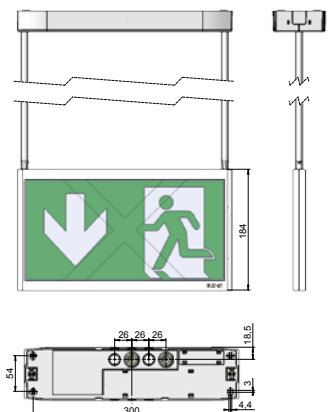


Ordering details - fastening set

Scope of supply (LED pictograms must ordered separte)	Order No.
Ceiling installation set for GuideLed DX 11021 CG-S with canopy incl. LED supply with additional switching input and CG-S technology (20 addresses)	40071355484
Ceiling installation set for GuideLed DX 11022 CG-S with canopy and tube suspension 0.5 m incl. LED supply with additional switching input and CG-S technology (20 addresses)	40071355485
Ceiling installation set for GuideLed DX 11023 CG-S with canopy and tube suspension 1.5 m incl. LED supply with additional switching input and CG-S technology (20 addresses)	40071355486
Ceiling installation set for GuideLed DX 11024 CG-S incl. recessed installation housing incl. LED supply with additional switching input and CG-S technology (20 addresses)	40071355487

GuideLed DX 11024 CG-S



Dimensions in mm



Ordering details - LED pictograms (fastening set required)

Scope of supply

		Order No.
LED piktogram PL/PR, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355540
LED piktogram PU/PU, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355541
LED piktogram PL/BL, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355542
LED piktogram PR/BL, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355543
LED piktogram PU/BL, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355544
LED piktogram PL/PR-R**, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355545
LED piktogram PL/PR-W**, for GuideLed DX/DXC 11021/11022/11023/11024 CG-S, ISO 7010 ¹ , 30 m		40071355546

¹ with additional option: red X

** R = Arrow from mounting wall
W = Arrow to mounting wall