

Product data sheet Spirotech

Product name

EPCK Solo 200L max 4bar

Article number

EPCK-S200-4.0

Product properties


The PicoControl Kompakt SOLO is a compact automatic expansion and pressure-maintaining device. The unit contains 1 pump (1x 100%) and an overflow valve. An unpressurized expansion tank is integrated.

- 1 pump (1x 100%)
- One mechanical overflow valve (1x 100%)
- Operational pressure range up to 4.0 bar
- 6 possible expansion tank volumes: 45 - 500 liters
- Two further unpressurized expansion tanks can be added
- Maximum expansion volume: 45 – 1,500 liters
- The maximum temperature at the point of connection: 70°C (over 70°C possible with auxiliary tank)
- Maximum safety temperature in the system: 110°C
- Maximum allowable pressure (PN): 6 bar

Product image



Product dimensions

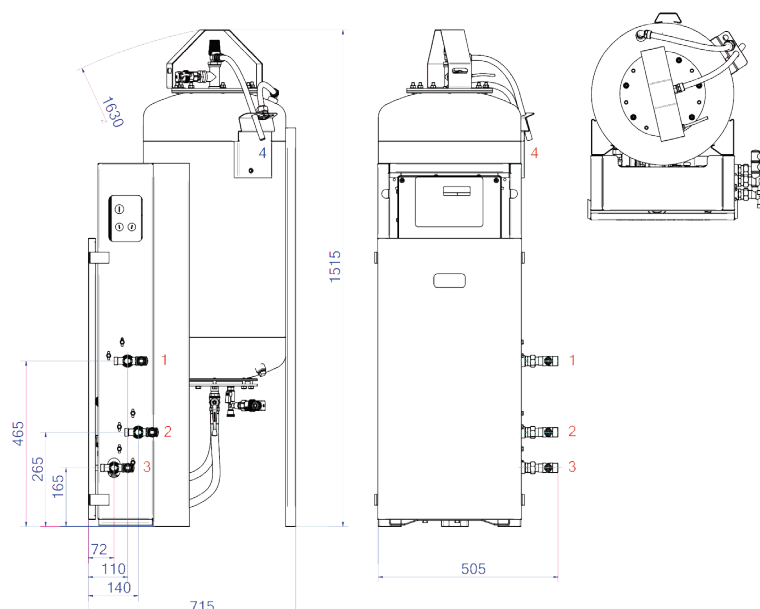

Product data sheet Spirotech

ETIM product data

| | |
|--------------------------------|-----------|
| Height | 1515 mm |
| Volume | 200 l |
| Max. operating pressure | 4 bar |
| Connection | Other |
| Power consumption | 0.22 kW |
| Couplable | Yes |
| Electrical connection | Terminals |
| Function master/slave | No |
| With pressure expansion vessel | Yes |
| Digital control unit | Yes |

| | |
|---------------------------------------|---------------|
| Double pump | No |
| With exchangeable membrane | Yes |
| Compressor in base | No |
| Nominal diameter expansion connection | 3/4 inch (20) |
| Max. medium temperature (continuous) | 70 °C |
| For heating systems up to | 1 MW |
| Horizontal positioning | No |
| Connection voltage | 230 V |
| Article compression class | PN 6 |
| Operating principle | Pump |

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website

