


Beacon LED Muse II

BEACON LED MUSE II 97CRI 4000K L3 ON-BOARD DIM WHITE

2059753

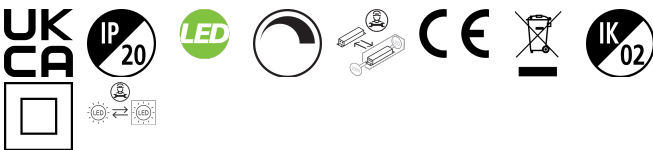

PRODUCT OVERVIEW

Product name	BEACON LED MUSE II 97CRI 4000K L3 ON-BOARD DIM WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
E-number FI	4274064
Warranty	5 years
Fixture luminous flux (lm)	623/1150
Luminaire efficacy (lm/W)	55
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597536

DATA TABLE

General data	
Product name	BEACON LED MUSE II 97CRI 4000K L3 ON-BOARD DIM WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting

Beacon LED Muse II

BEACON LED MUSE II 97CRI 4000K L3 ON-BOARD DIM WHITE
2059753

Performance ambient temperature Tq (°C)	25
E-number FI	4274064
Warranty	5 years

Optical data

Fixture luminous flux (lm)	623/1150
Luminaire efficacy (lm/W)	55
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	230
Electrical protection	Class II
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	47500

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	135
Nominal Product Diameter (mm)	80
Weight (kg)	1.01





Packaging

Single packaging type	Carton
Product EAN number	5025768597536
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768597536
Packaging outer length / height (cm)	17.5

Beacon LED Muse II

BEACON LED MUSE II 97CRI 4000K L3 ON-BOARD DIM WHITE
2059753

PHOTOMETRY

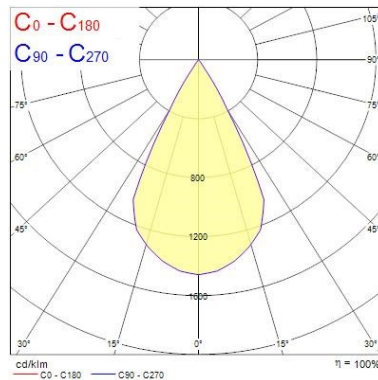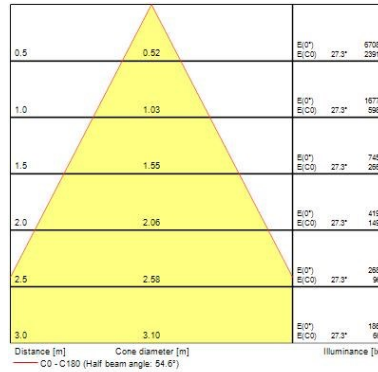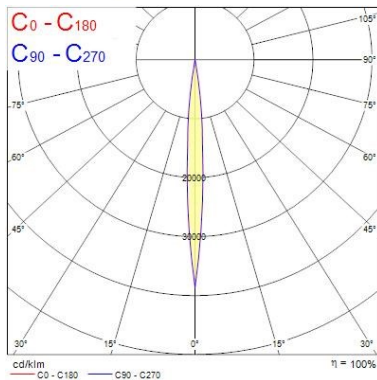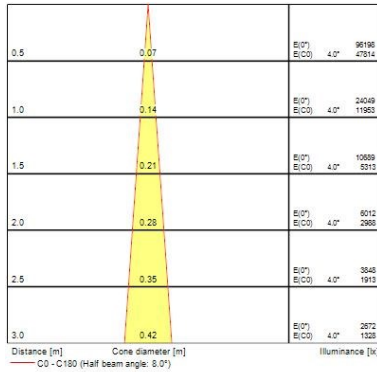

TECHNICAL DRAWINGS

