


Features

- Lytespan Trimless Recessed - 3 circuit track + 2 circuit control L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC, DALI, DMX, 1-10V etc. compatible, circuits can be controlled individually, aluminum body, suitable for trimless recessed installation, 3000 x 92 x 42.8 mm (L x W x H), black (RAL 9005). Please check compatible adaptor list.

Product Overview

Product name	LYTESPAN TRIMLESS RECESSED 3M BLACK 9000-3/B-TR
Technology	Accessory
Housing	Aluminium
Mount	Ceiling recessed mounting, Wall recessed
General application	Hospitality, Museums & Galleries, Office
ETIM Class	EC000101
Electrical protection	Class I
Housing colour	RAL9005
Product EAN number	5025768702527
Warranty	5 years

Technical drawings

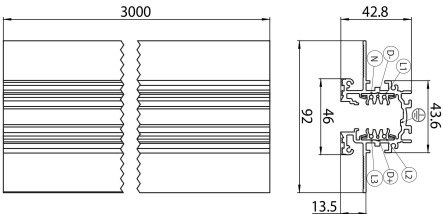

LYTESPAN TRIMLESS RECESSED 3M BLACK 9000-3/B-TR 2070252

Data table

GENERAL DATA

Product name	LYTESPAN TRIMLESS RECESSED 3M BLACK 9000-3/B-TR
Technology	Accessory
Accessory type	Electrical
Type of accessory	Track
Housing	Aluminium
Mount	Ceiling recessed mounting, Wall recessed
General application	Hospitality, Museums & Galleries, Office
ETIM Class	EC000101
Warranty	5 years

ELECTRICAL DATA

Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Control gear required	No

PHYSICAL DATA

Housing colour	RAL9005
Nominal Product Length (mm)	3000
Nominal Product Width (mm)	92
Nominal Product Height (mm)	42.8
Weight (kg)	5.3

PACKAGING

Product EAN number	5025768702527
Packaging single length / height (cm)	306.0
Packaging single width (cm)	6.2
Packaging single depth (cm)	6.2

LYTESPAN TRIMLESS RECESSED 3M BLACK 9000-3/B-TR 2070252

DUN14 (inner)	05025768702527
Units per outer package	1
Packaging outer length / height (cm)	306.0
Packaging outer width (cm)	6.2
Packaging outer depth (cm)	6.2

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No