

START Surface IP44 DualTone

START Surface IP44 1550lm MW 830/840 DualTone


0043435




PRODUCT OVERVIEW

Product name	START Surface IP44 1550lm MW 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Warranty	3 years
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434353

PHOTOMETRY

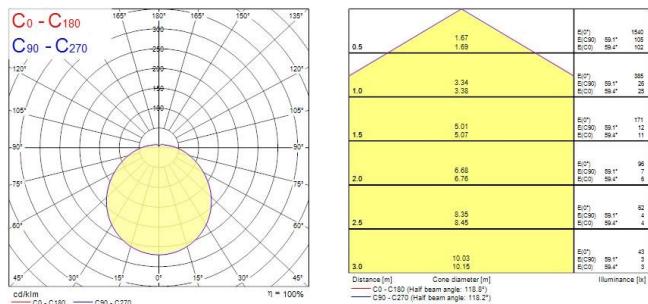

START Surface IP44 DualTone
START Surface IP44 1550lm MW 830/840 DualTone
0043435

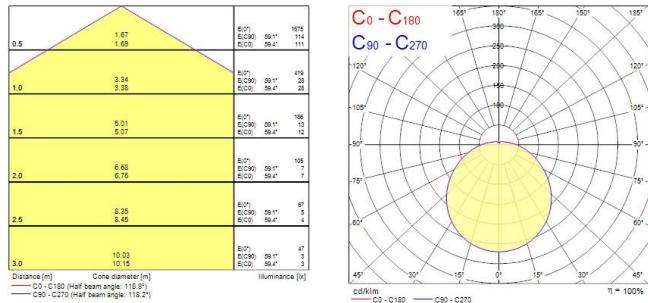

TECHNICAL DRAWINGS

