


Inverto Pendant

Inverto Pend Rmt NW Eb White
3080062



Product features

- Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, white coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA, CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.

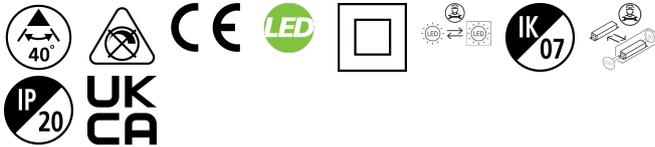


PRODUCT OVERVIEW

Product name	Inverto Pend Rmt NW Eb White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
ETIM Class	EC001743
Warranty	5 years
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	8711971800620

PHOTOMETRY

Inverto Pendant

Inverto Pend Rmt NW Eb White
3080062



0.5	0.36	E(0°) E(C0)	1974 1624
1.0	0.72	E(0°) E(C0)	984 1050
1.5	1.08	E(0°) E(C0)	644 603
2.0	1.44	E(0°) E(C0)	477 339
2.5	1.80	E(0°) E(C0)	350 247
3.0	2.16	E(0°) E(C0)	260 185

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.6°)

TECHNICAL DRAWINGS

