


TRONIX

guided by light

SPECIFICATION

5-channel LED dimmer with CASAMBI light control, for constant voltage

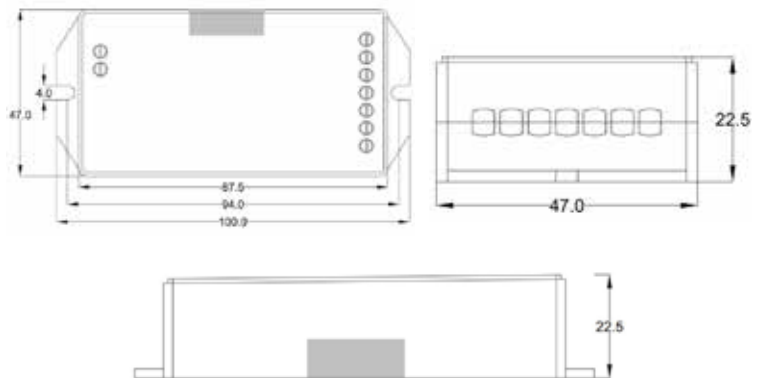

5 channels

| | |
|-----------------------------|--|
| Part no. | 214-212 |
| Type | Casambi controllable 5 channels LED dimmer |
| Power supply input | 12 - 24 Vdc |
| Max. output power at 12 Vdc | 96W per channel, 120W total |
| Max. output power at 24 Vdc | 192W per channel, 240W total |
| PWM frequency | 10.000 Hz |
| Radio signal | 2.4 - 2.483 GHz, 8 dBm |
| Ambient temperature (ta) | 0 - +40 °C |
| Rated max. temperature (tc) | 60 °C |
| Dimensions | 100 x 47 x 22,5 mm |

- LED dimmer for convenient operation with smart devices
- Configurable with the CASAMBI app and usable in many ways
- To control LED strips and other constant voltage modules
- 5 channels configurable via choice of profile (TW, RGB, RGBW, RGB+TW, 5 independent channels) possible before pairing to the network: change profile
- You can setup a gateway, but it is not necessary
- Integrated antenna (drawing: grey marking, do not cover with metal housing)
- Housing built-in, protection class: 3
- Do not insert switches into the secondary circuit!
- Only connect LEDs in parallel

