


START Surface IP44 DualTone PIR
START Surface IP44 PIR 1800lm 830/840 DualTone
0043438

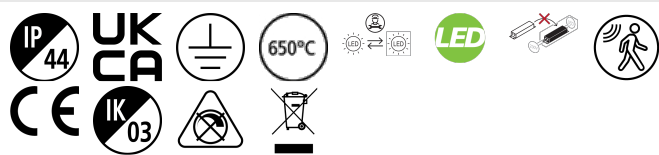

PRODUCT OVERVIEW

Product name	START Surface IP44 PIR 1800lm 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
E-number FI	4170573
Warranty	3 years
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	75
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434384

DATA TABLE

General data	
Product name	START Surface IP44 PIR 1800lm 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

START Surface IP44 DualTone PIR

START Surface IP44 PIR 1800lm 830/840 DualTone

0043438

E-number FI	4170573
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	75
Correlated colour temperature range (K)	3000 - 4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.7
Electrical protection	Class I
Control gear type	LED driver constant current
Drive current (mA)	75
Inrush Current (A)	2
Inrush Duration (µs)	30
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	High (>40%)
Max. products per 10A C Breaker	15
Max. products per 20A B Breaker	18
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L90 B50	43000

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK03
Diffuser finish	Opal
Diffuser material	Polypropylene
Nominal Product Diameter (mm)	360
Weight (kg)	0.61

Packaging

Single packaging type	Carton
Product EAN number	5410288434384
Packaging single width (cm)	11.8


START Surface IP44 DualTone PIR
START Surface IP44 PIR 1800lm 830/840 DualTone
0043438

Packaging single depth (cm)	39.0
DUN14 (outer)	15410288434381
Packaging outer length / height (cm)	74.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

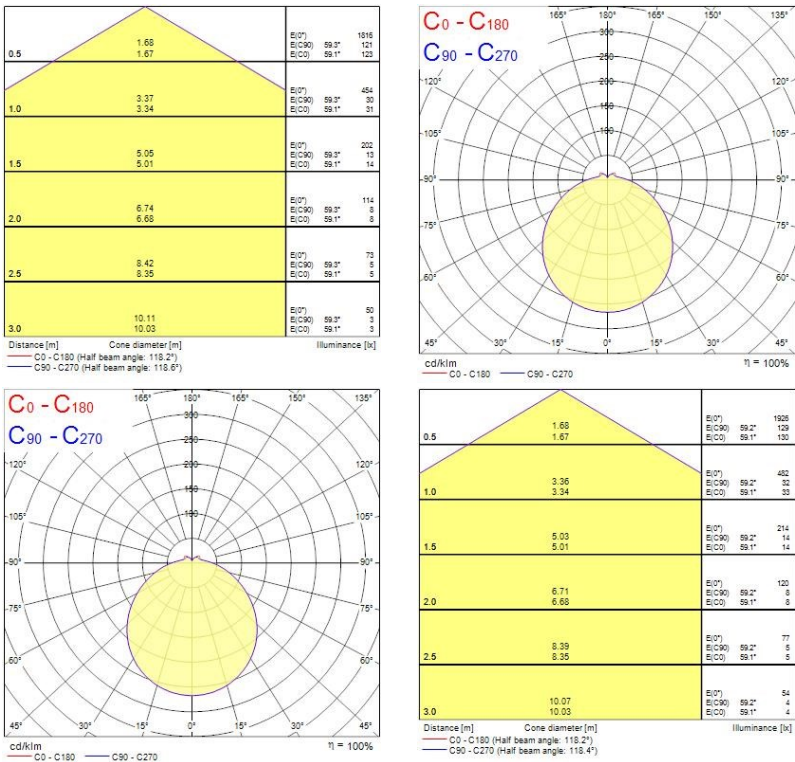

TECHNICAL DRAWINGS

