



Features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 360mm.
- Besa mounting box compatible, hole distance 51mm.
- DualTone functionality enables switch between 3000K and 4000K colour temperatures.
- Power 24W, output 1800 lumens (4000K).
- Supplied with integrated PIR (infra-red) sensor for automatic on-off presence control.
- IK03, IP44. Low maintenance with lifespan 90,000 hours L70:B50.

Product Overview


Product name	START Surface IP44 PIR 1800lm 830/840 DualTone
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
E-number FI	4170573
Fixture luminous flux (lm)	1800
Luminaire efficacy (lm/W)	75
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434384

Light your world


Warranty

3 years

Photometry

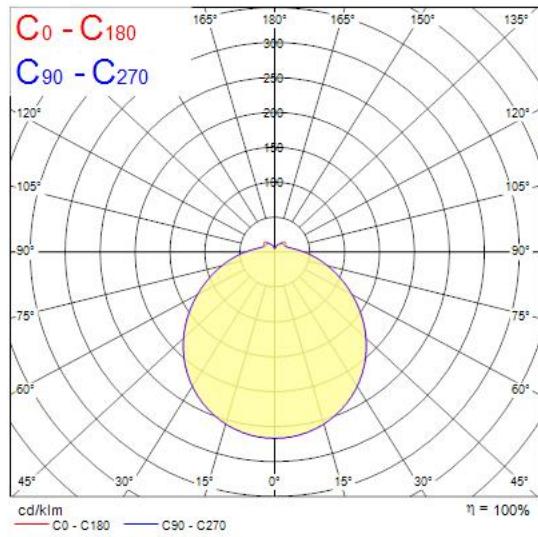

Technical drawings

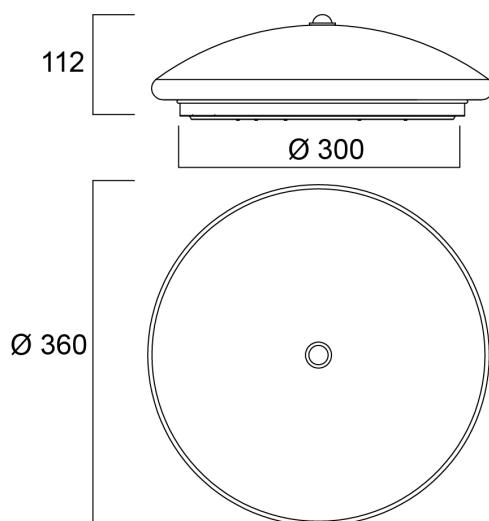

Light your world