

Walraven BISOFIX® 88

(D0540)


for insulated pipes



0880060



0880273

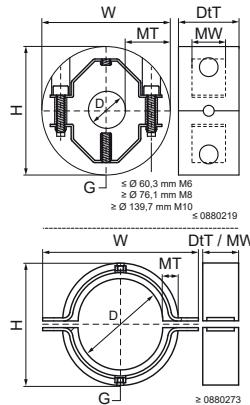

Features & benefits

- two-screw clamp integrated in PUR foam
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- no adhesion necessary due to Inda rubber inlay
- vapour proof glueing to pipe insulation
- suitable for heavy applications (for example with bigger spans), waste stacks, etc.
- the whole is smoothly completed for a better connection with the pipe insulation
- the foam prevents the forming of a thermal bridge and prevents the steel parts from corrosion
- material: clamp of steel; insulation shell made of PUR closed cell solid foam
- good resistant to chemicals influences
- excellent thermal and mechanical properties
- clamp: zinc plated
- working temperature from -50 °C to +105 °C

Product Number	VVS Number	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz
Reference letter		D	D	G	H	W	DtT	MW	MT	ds	Fa,z
Unit description			"		mm	mm	mm	mm	mm		N
0880015	018038516	-	-	M8/M10/G½"	87	87	40	40	30.00	M6	290
0880018	018038518	-	-	M8/M10/G½"	87	87	40	40	30.00	M6	300
0880021	018038521	DN 15	½	M8/M10/G½"	87	87	40	40	30.00	M6	360
0880022	018038522	-	-	M8/M10/G½"	87	87	40	40	30.00	M6	370
0880027	018038527	DN 20	¾	M8/M10/G½"	87	87	40	40	30.00	M6	450
0880028	018038528	-	-	M8/M10/G½"	87	87	40	40	30.00	M6	470
0880033	018038534	DN 25	1	M8/M10/G½"	96	96	40	40	30.00	M6	570
0880035	018038535	-	-	M8/M10/G½"	96	96	40	40	30.00	M6	590
0880042	018038542	DN 32	1¼	M8/M10/G½"	103	103	40	40	30.00	M6	710
0880048	018038548	DN 40	1½	M8/M10/G½"	108	108	40	40	30.00	M6	810
0880054	018038554	-	-	M8/M10/G½"	117	117	40	40	30.00	M6	910
0880057	018038557	-	-	M8/M10/G½"	117	117	40	40	30.00	M6	960
0880060	018038560	DN 50	2	M8/M10/G½"	120	120	50	50	30.00	M6	1,270
0880076	018038576	DN 65	2½	M8/M10/G½"	136	136	50	50	30.00	M8	1,600
0880089	018038589	DN 80	3	M8/M10/G½"	149	149	50	50	30.00	M8	1,870
0880108	018038590	-	-	M8/M10/G½"	188	188	60	40	60.00	M8	2,720
0880114	018038591	DN 100	4	M8/M10/G½"	195	195	60	40	60.00	M8	2,880
0880133		-	-	M8/M10/G½"	219	219	60	40	60.00	M8	3,350
0880139	018038594	DN 125	5	M8/M10/G½"	219	219	60	40	60.00	M10	3,520
0880159		-	-	G½"-M12	239	239	60	40	60.00	M10	4,010
0880168		DN 150	6	G½"-M12	248	248	60	40	60.00	M10	4,240
0880219		DN 200	8	M16/G¾"	340	340	100	100	60.00	M10	9,200
0880273		DN 250	10	M16	393	493	100	100	60.00	M16	11,470
0880324		DN 300	12	M20	448	544	100	100	60.00	M16	13,600