


LYTEPANEL II 600X600 Recessed
LYTEPANEL II 600 4K DALI
2059432



Product features

- Back lit LED recessed panel, 4454lm, 31W, 144lm/W, 4000K, Driver Current 275mA, CRI:80, DALI or Switch Dim, IP40, IK02, UGR<21, zintec powder coated steel body, 55,000hrs (L90B10), HxWxD = 595x595x95mm, 3 step MacAdam Ellipse, Class I, 220-240V.

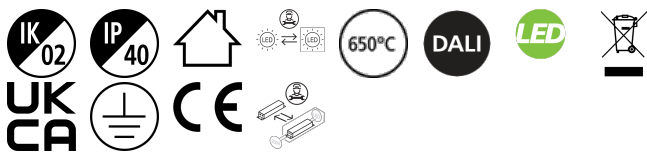

PRODUCT OVERVIEW

Product name	LYTEPANEL II 600 4K DALI
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4454
Luminaire efficacy (lm/W)	143.68
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	31
Electrical protection	Class I
Dimming method	DALI, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40
IK rating	IK02
Product EAN number	5025768594320

PHOTOMETRY

LYTEPANEL II 600X600 Recessed

LYTEPANEL II 600 4K DALI


2059432

0.5	1.11 1.10	E07 E(C90) E(C0)	7403 45.1° 47.8°	1102 1102
1.0	2.23 2.21	E07 E(C90) E(C0)	45.1° 47.8°	1881 270 211
1.5	3.34 3.31	E07 E(C90) E(C0)	45.1° 47.8°	623 121 125
2.0	4.46 4.41	E07 E(C90) E(C0)	45.1° 47.8°	463 89 71
2.5	5.57 5.51	E07 E(C90) E(C0)	45.1° 47.8°	296 44 48
3.0	6.69 6.62	E07 E(C90) E(C0)	45.1° 47.8°	208 31 31

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 90°)

— C90 - C270 (Half beam angle: 90°)



TECHNICAL DRAWINGS

