



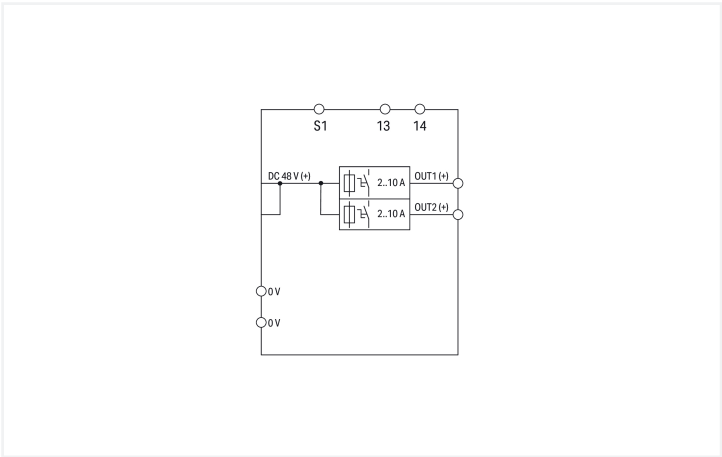

Similar to illustration

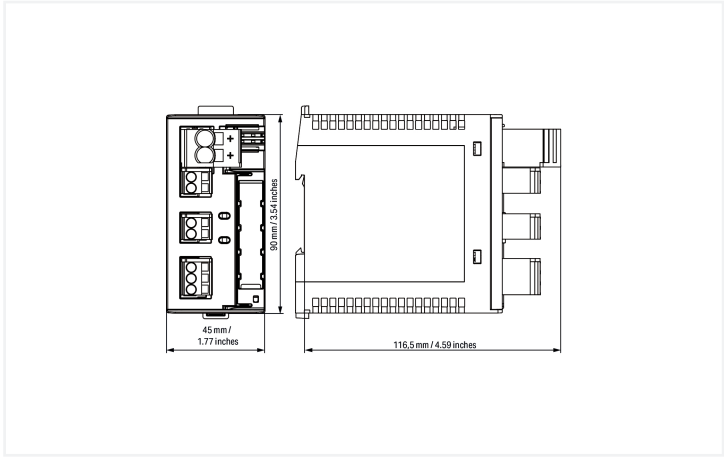

- Features:**
- Space-saving ECB with two channels
 - Nominal current: 2 ... 10 A (adjustable for each channel via sealable selector switch)
 - Switch-on capacity > 23000 µF per channel
 - One illuminated, three-colored button per channel simplifies switching (on/off), resetting, and on-site diagnostics
 - Time-delayed switching of channels
 - Tripped message (common group signal) via isolated contact (13 / 14)
 - Remote input resets all tripped channels
 - Potential-free signal contact 13 / 14 reports "channel switched off" and "tripped channel" – does not support communication via pulse sequence

Technical data			
Input		Output	
Nominal input voltage $U_{i\text{nom}}$	48 VDC	Total number of channels (module)	2
Input voltage range	32 ... 58 VDC	Nominal output voltage $U_{o\text{nom}}$	2 x 48 VDC
		Output voltage range	32 ... 58 VDC (U_e – voltage drop)
		Voltage drop	≤ 175 mV (10 A) (Input +)
		Nominal output current $I_{o\text{nom}}$	2 x 2 / 3 / 4 / 6 / 8 / 10 A (adjustable for each channel via selector switch)
		Default Setting	DC 10 A; switched on



Output	
Trip time	16 ms ... 100 s (load-dependent)
Switch-on capacity	
Switch-on behavior	Time-delayed channel switching (load-dependent, min. 50 ms / max. 5 s)
Active current limitation	No
Current limitation	No

Efficiency/Power Losses	
Power loss P _I	≤ 0.84 W; ≤ 4.5 W (2 x 10 A)
Efficiency (typ.)	99 %

Signaling and Communication	
Signaling	2 x LED (green/red/orange) 1 x Remote control input (S1) 1 x Group signal contact (13; 14)
Operation status indicator	Green LED (channel OK) Red LED (tripped channel)
Remote input	Reactivation of all tripped channels via 15 ... 58 VDC pulse for min. 500 ms

Circuit Protection	
Internal fuse	T 15 A per channel

Safety and protection	
Isolation voltage (connectors – housing)	0.5 kVDC
Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	No
Resistance to reverse feed	≤ 58 VDC
Pollution degree	2
Transient suppression (primary)	Suppressor diode (68 V)
Parallel operation of single channels	Not permitted
Series operation	No
MTBF	> 500,000 h (per IEC 61709)

Connection Data			
Connection 1		Connection 2	
Connection type	Input (+)	Connection type	Input (–); output; signaling
Connection technology	Push-in CAGE CLAMP®	Connection technology	CAGE CLAMP®
WAGO connector	WAGO 831 Series	WAGO connector	WAGO 721 Series
Solid conductor	0.5 ... 10 mm² / 20 ... 8 AWG	Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.5 ... 10 mm² / 20 ... 8 AWG	Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches	Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Width	45 mm / 1.772 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	115.5 mm / 4.547 inches

Mechanical data	
Mounting type	DIN-35 rail



Material data	
Fire load	0.655 MJ
Weight	170 g

Environmental requirements	
Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	No derating

Standards and Specifications	
Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 UL 508 UL 2367 DNV

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
Customs tariff number	85362010900

Product Classification	
UNSPSC	39121634
eCl@ss 10.0	27-37-18-02
eCl@ss 9.0	27-37-18-02
ETIM 9.0	EC001440
ETIM 10.0	EC001440
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates	
General approvals	Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV GL SE	-	TAA0000281

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-1662/000-250



Documentation

Bid Text
787-1662/000-250
03.07.2019
xml 7.12 KB
↓
787-1662/000-250
02.07.2019
docx 20.70 KB
↓

Instruction Leaflet
Elektronische Schutz- schalter
pdf 572.00 KB
↓

Application Notes

Application Note e!COCKPIT
e!COCKPIT Application Note WagoAppFuse (a2019001)
2021-11-08 06.12.2021
pdf 548.17 KB
↓

Application note SIEMENS
Elektronische Schutz- schalter Serie 787 ab FW2.24 (a500371)
1.0.0 14.02.2017
zip 13109.22 KB
↓

CAD/CAE-Data

CAD data
2D/3D Models 787-1662/000-250



CAE data
EPLAN Data Portal 787-1662/000-250
WSCAD Universe 787-1662/000-250





1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker



Item No.: 2009-145
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 248-501
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.1.2 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-721
Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured



Item No.: 210-769
SCREWDRIVER; green