

START eco Panel Flat 600x600
START eco Panel Flat 600x600 3200Lm 840
0047401



Product features

- Edge lit LED flat panel low output. 40 W, Neutral White, 4000 K, 3200 lumens, 80 lm/W, 30000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 595 x 595 mm




PRODUCT OVERVIEW

Product name	START eco Panel Flat 600x600 3200Lm 840
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276964
E-number SE	7013616
Warranty	3 years
Useful luminous flux (Fuse)	3200
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	80
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288474014

START eco Panel Flat 600x600
START eco Panel Flat 600x600 3200Lm 840
0047401

PHOTOMETRY

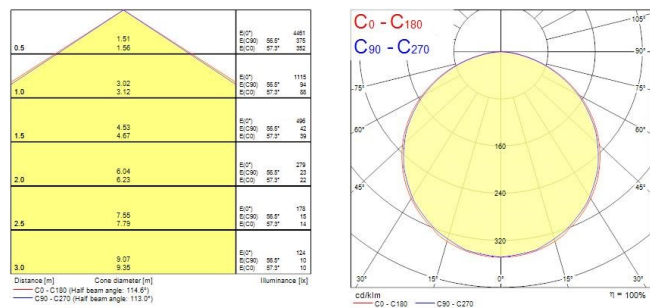

TECHNICAL DRAWINGS

