


SylCircle DualTone


SYLCIRCLE IP44 520LM 830/840 DUALTONE
0043496

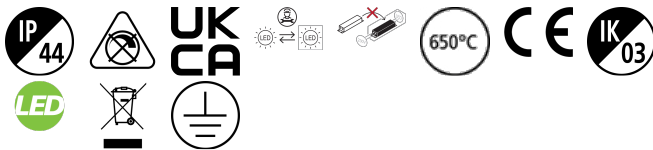

PRODUCT OVERVIEW

Product name	SYLCIRCLE IP44 520LM 830/840 DUALTONE
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Warranty	3 years
Fixture luminous flux (lm)	520
Luminaire efficacy (lm/W)	85
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	6
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288434964


PHOTOMETRY

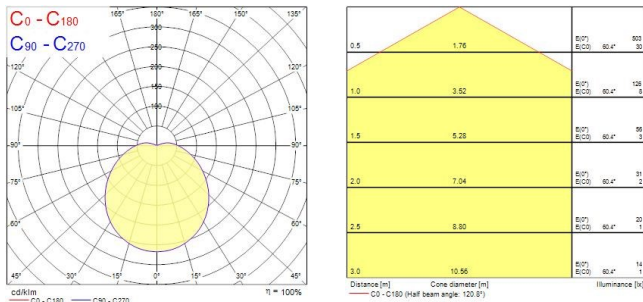

SylCircle DualTone

SYLCIRCLE IP44 520LM 830/840 DUAL TONE
0043496

0.5	1.76	E(0°) E(C0)	80.4°	99°	34
1.0	3.52	E(0°) E(C0)	80.4°	119°	9
1.5	5.28	E(0°) E(C0)	80.4°	82	4
2.0	7.04	E(0°) E(C0)	80.4°	58	2
2.5	8.80	E(0°) E(C0)	80.4°	42	1
3.0	10.56	E(0°) E(C0)	80.4°	31	1
Distance [m]	Cone diameter [m]			Illuminance [lx]	
C0 - C180 (Half beam angle: 120.8°)					



TECHNICAL DRAWINGS

