



Features

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 4000K, 25000h lifetime


Product Overview

|                                   |                                 |
|-----------------------------------|---------------------------------|
| Product name                      | SYLBATTEN IP20 L1500 TWIN 4000K |
| Technology                        | LED                             |
| Cap/Base                          | N/A                             |
| Housing                           | PC Polycarbonate                |
| General application               | Residential & Consumer          |
| ETIM Class                        | EC000109                        |
| Fixture luminous flux (lm)        | 4100                            |
| Luminaire efficacy (lm/W)         | 114                             |
| Correlated colour temperature (k) | 4000                            |
| Light colour                      | Neutral White                   |
| CRI (Ra)                          | 80                              |
| Photobiological Risk Group        | RG0                             |
| Total power consumption (W)       | 36                              |
| Electrical protection             | Class I                         |
| Control gear type                 | LED driver constant current     |
| Dimmable                          | No                              |
| Housing colour                    | White                           |
| IP rating                         | IP20                            |
| IK rating                         | IK02                            |

SYLBATTEN IP20 L1500 TWIN 4000K  
0045164

|                    |               |
|--------------------|---------------|
| Product EAN number | 5410288451640 |
| Warranty           | 2 years       |
| Dimming method     | N/A           |

Photometry

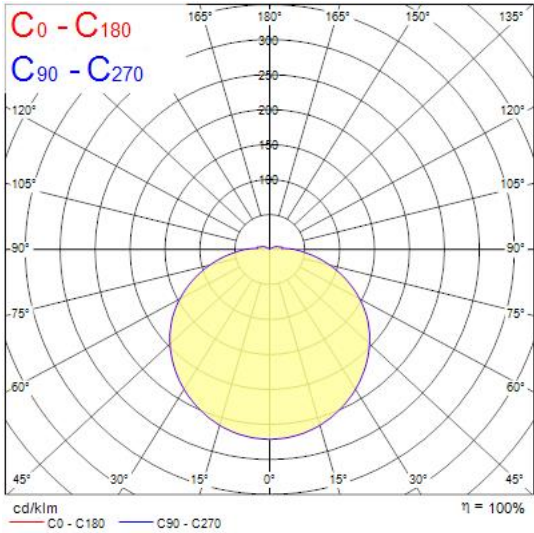

Technical drawings

