

# DeltaWing LED G1- DALI dimmable & Microwave sensor

*DELTAWING LED72 DALI MW 4K 1200*  
0044899



## Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, Microwave sensor, 7260lm, 71W, lifespan: 55,000 hours L90B10, A++ A+ A




## PRODUCT OVERVIEW

Product name	DELTAWING LED72 DALI MW 4K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Fixture rating	Enclosed
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	7260
Fixture luminous flux (lm)	7260
Luminaire efficacy (lm/W)	102.25
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	102
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	71
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	5
Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448992

## DeltaWing LED G1- DALI dimmable & Microwave sensor

*DELTAWING LED72 DALI MW 4K 1200*  
**0044899**

### PHOTOMETRY

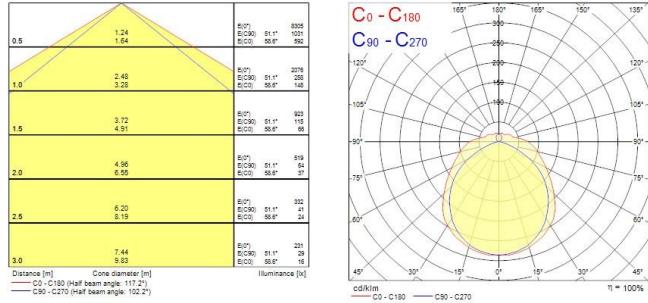

### TECHNICAL DRAWINGS

