


## SylCircle DualTone

SYLCIRCLE IP44 1550LM MW 830/840 DUAL TONE



0043506

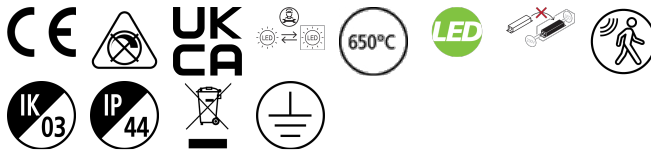

### PRODUCT OVERVIEW


Product name	SYLCIRCLE IP44 1550LM MW 830/840 DUAL TONE
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting
Warranty	3 years
Fixture luminous flux (lm)	1550
Luminaire efficacy (lm/W)	85
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
LED Flickering Rate	High (>40%)
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288435060

### PHOTOMETRY

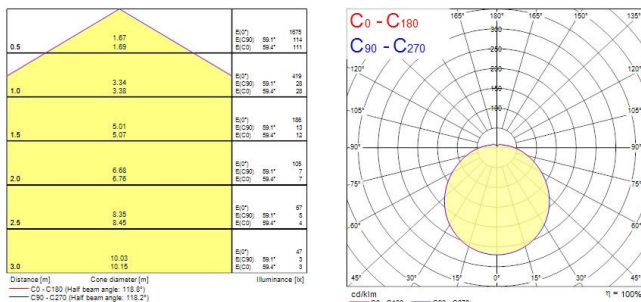

## SylCircle DualTone

SYLCIRCLE IP44 1550LM MW 830/840 DUAL TONE  
0043506

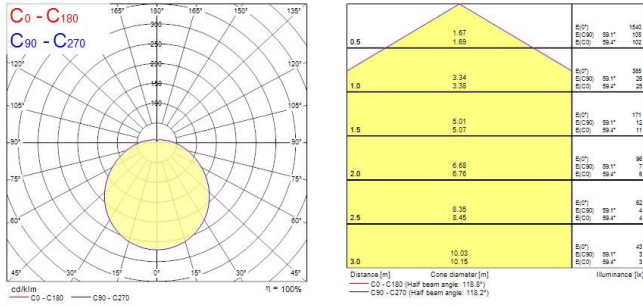

### TECHNICAL DRAWINGS

