


Walraven BISOFIX® E13

(D0302)

for insulated pipes

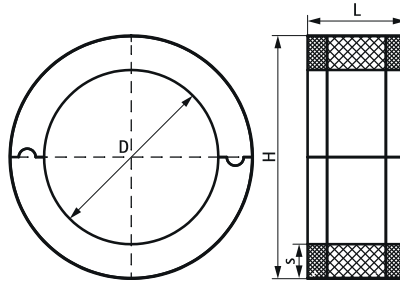

Features & benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 80\text{mm}$ = 80kg/m^3
- PIR density for $D > 80\text{mm}$ = 120kg/m^3
- temperature range $-45\text{ }^{\circ}\text{C}$ - $+105\text{ }^{\circ}\text{C}$



Product Number	Outside Pipe Diameter	DN	Total Width x Total Height x Total Length	Material Thickness	Operating Temperature	Maximum Allowed Load Faz
Reference letter	D	D	W x H x L	MT		Fa,z
Unit description	mm		mm x mm x mm	mm	CEL	N
I130000008	8		34.6 x 34.6 x 50	13.3	-45 - 105	100
I130000010	10.2		36.8 x 36.8 x 50	13.3	-45 - 105	100
I130000012	12		38.6 x 38.6 x 50	13.3	-45 - 105	100
I130000015	15		41.6 x 41.6 x 50	13.3	-45 - 105	100
I130000018	17.2 - 18	DN 10	44.6 x 44.6 x 50	13.3	-45 - 105	100
I130000022	21.3 - 22	DN 15	48.6 x 48.6 x 50	13.3	-45 - 105	100
I130000028	26.9 - 28	DN 20	55 x 55 x 50	13.3	-45 - 105	100
I130000035	33.7 - 35	DN 25	61.6 x 61.6 x 50	13.3	-45 - 105	100
I130000042	42.4	DN 32	69 x 69 x 50	13.3	-45 - 105	150
I130000048	48.3	DN 40	74.9 x 74.9 x 50	13.3	-45 - 105	225
I130000054	54		80.6 x 80.6 x 50	13.3	-45 - 105	225
I130000057	57		83.6 x 83.6 x 50	13.3	-45 - 105	350
I130000060	60.3	DN 50	88.1 x 88.1 x 50	13.9	-45 - 105	350
I130000064	64		100 x 100 x 50	18	-45 - 105	350
I130000070	70		102.6 x 102.6 x 50	16.3	-45 - 105	425
I130000076	76.1	DN 65	108.7 x 108.7 x 50	16.3	-45 - 105	575
I130000089	88.9	DN 80	124.7 x 124.7 x 50	17.9	-45 - 105	875
I130000102	101.6		134.2 x 134.2 x 50	16.3	-45 - 105	1,000
I130000108	108		140.6 x 140.6 x 50	16.3	-45 - 105	1,075
I130000114	114.3	DN 100	152.1 x 152.1 x 50	18.9	-45 - 105	1,250
I130000133	133		165.6 x 165.6 x 100	16.3	-45 - 105	1,475
I130000140	139.7	DN 125	176.1 x 176.1 x 100	18.2	-45 - 105	1,700
I130000160	159 - 160		192.6 x 192.6 x 100	16.3	-45 - 105	1,950
I130000168	168.3	DN 150	200.9 x 200.9 x 100	16.3	-45 - 105	2,125