



Features

- Ceiling / wall round luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 15W, lumen output 1500 lumens, lumen efficacy 100 lm/W, dual color temperature (3000K/4000K). Supplied with phase dimming driver (leading edge/trailing edge). Mains Voltage 220-240V~. Body Size: 220mm diameter x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 58000 hours LED lifespan expectancy. Warranty: 3 years.

Product Overview

Product name	START SURFACE SLIM IP54 ROUND 1500LM 2CCT D WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
E-number FI	4278347
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	100
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	4
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07

Light your world

START SURFACE SLIM IP54 ROUND 1500LM 2CCT D WH 0043510


Product EAN number

5410288435107


Warranty

3 years

Photometry

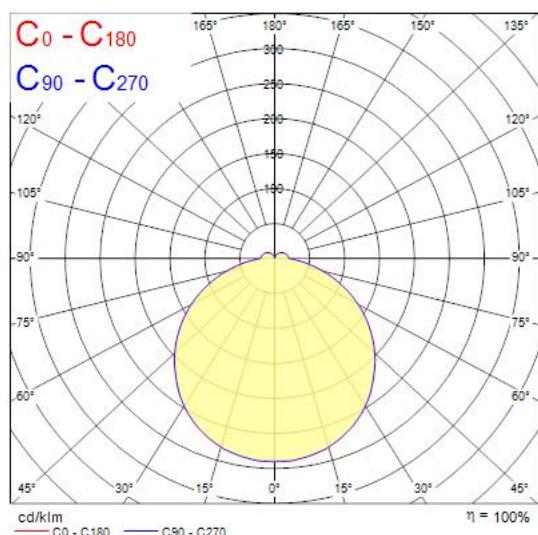

Technical drawings

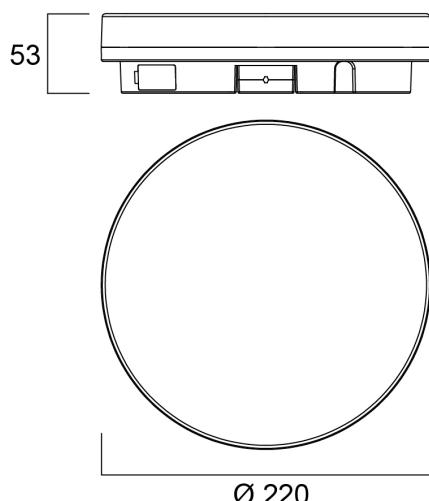

Light your world