

Features


- Onetrack 3-phase - 3 circuit track L1/L2/L3/ Neutral/ground 16A/440V, circuits can be controlled individually, aluminium body, suitable for surface and suspended mounting, 3000 x 30.7 x 37.8 mm (L x W x H), black (RAL 9005).

Product Overview

| | |
|---------------------|---------------------------------------|
| Product name | ONETRACK 3PHASE 3M BLACK 9000B-3/B-ST |
| Technology | Accessory |
| Housing | Aluminium |
| General application | Museums & Galleries, Office |
| ETIM Class | EC000101 |
| Housing colour | Black |
| Warranty | 5 years |

ONETRACK 3PHASE 3M BLACK 9000B-3/B-ST 9200307

Technical drawings

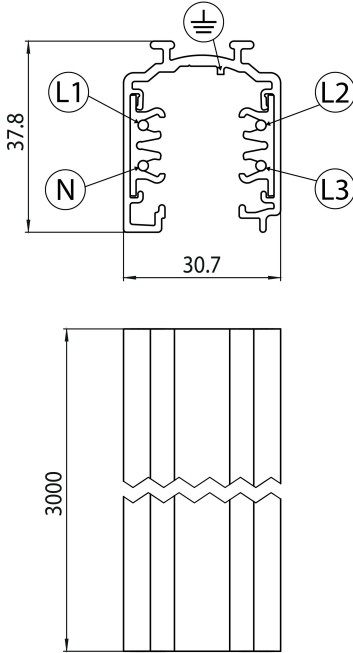

Data table

GENERAL DATA

| | |
|---------------------|---------------------------------------|
| Product name | ONETRACK 3PHASE 3M BLACK 9000B-3/B-ST |
| Technology | Accessory |
| Housing | Aluminium |
| General application | Museums & Galleries, Office |
| ETIM Class | EC000101 |
| Warranty | 5 years |

ELECTRICAL DATA

| | |
|-----------------------|----|
| Control gear required | No |
|-----------------------|----|

ONETRACK 3PHASE 3M BLACK 9000B-3/B-ST 9200307

PHYSICAL DATA

| | |
|-----------------------------|-------|
| Housing colour | Black |
| Nominal Product Length (mm) | 3000 |
| Nominal Product Width (mm) | 30.7 |
| Nominal Product Height (mm) | 37.8 |
| Weight (kg) | 2.25 |

PACKAGING

| | |
|---------------------------------------|---------|
| Single packaging type | Plastic |
| Packaging single length / height (cm) | 306.0 |
| Packaging single width (cm) | 3.3 |
| Packaging single depth (cm) | 3.5 |
| Units per outer package | 276 |
| Packaging outer length / height (cm) | 310.0 |
| Packaging outer width (cm) | 80.0 |
| Packaging outer depth (cm) | 50.0 |

SAFETY DATA

| | |
|-------------------------------------|----|
| Special purpose lamp | No |
| Dry applications use only | No |
| Suitable for household illumination | No |