


OTAO LINEAR ST EM MODULE WH
0041827



Features


- Self-Test on/off emergency module for Otao luminaires, incl LiFePO4 battery, EM indicator and 2pcs of aluminium extrusion for mechanical connection with Otao luminaires; no Self-Test button. RAL9003 (white) finishing.

Product Overview

Product name	OTAO LINEAR ST EM MODULE WH
Technology	LED (3 SDCM)
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
General application	Office, Education
ETIM Class	EC000471
Fixture luminous flux (lm)	300
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Electrical protection	Class I
Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Product EAN number	5410288418278
Warranty	5 years

OTAO LINEAR ST EM MODULE WH
0041827

Technical drawings

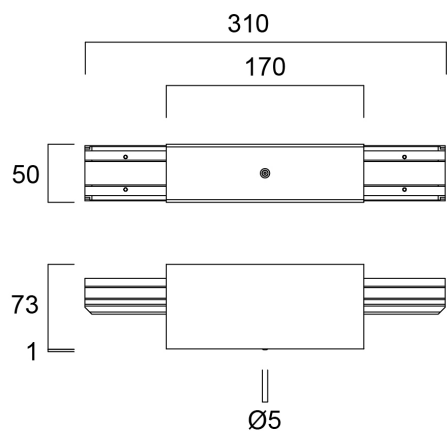

Data table

GENERAL DATA

Product name	OTAO LINEAR ST EM MODULE WH
Technology	LED (3 SDCM)
Type of accessory	Other
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
ETIM Class	EC000471
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	300
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Emergency duration (h)	3

OTAO LINEAR ST EM MODULE WH 0041827

ELECTRICAL DATA

Electrical protection	Class I
Control gear required	No
Max. products per 10A C Breaker	100
Max. products per 13A C Breaker	100
Max. products per 16A C Breaker	100
Max. products per 20A C Breaker	100
Max. products per 10A B Breaker	100
Max. products per 13A B Breaker	100
Max. products per 16A B Breaker	100

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Nominal Product Length (mm)	170
Nominal Product Width (mm)	50
Nominal Product Height (mm)	73
Weight (kg)	1.95

PACKAGING

Product EAN number	5410288418278
Packaging single length / height (cm)	32.0
Packaging single width (cm)	6.1
Packaging single depth (cm)	7.8
DUN14 (inner)	15410288418275
Units per outer package	5
Packaging outer length / height (cm)	34.0
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	37.0

SAFETY DATA



OTAO LINEAR ST EM MODULE WH
0041827

Glow Wire Test (°C)	650
Optimal operating condition (°C)	5-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No