



### Features

- Ceiling / wall round luminaire with integrated LED. Perfect solution for corridors, circulation areas or bathrooms. Even and uniform light in a slim but robust design. Power 35W, lumen output 4000 lumens, lumen efficacy 114 lm/W, dual color temperature (3000K/4000K). Supplied with phase dimming driver (leading edge/trailing edge). Mains Voltage 220-240V~. Body Size: 400mm diameter x 53mm height. IK07, IP54 Protection rating. PC Polycarbonate Opal diffuser. Low maintenance with 58000 hours LED lifespan expectancy. Warranty: 3 years.

### Product Overview

Product name	START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
E-number FI	4278399
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	114
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	4
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07

Light your world

## START SURFACE SLIM IP54 ROUND 4000LM 2CCT D WH 0043513


Product EAN number

5410288435138


Warranty

3 years

### Photometry

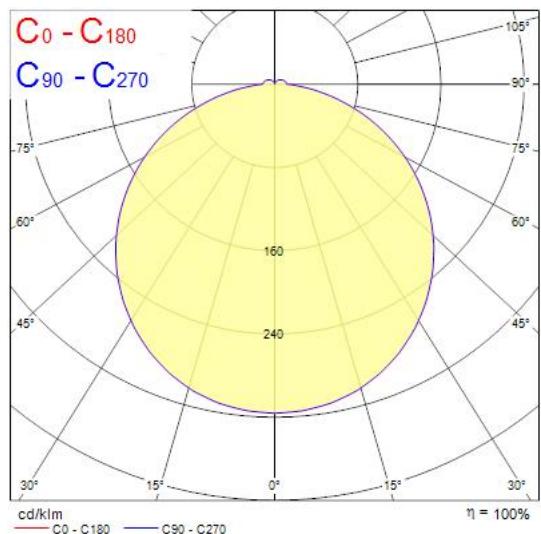

### Technical drawings

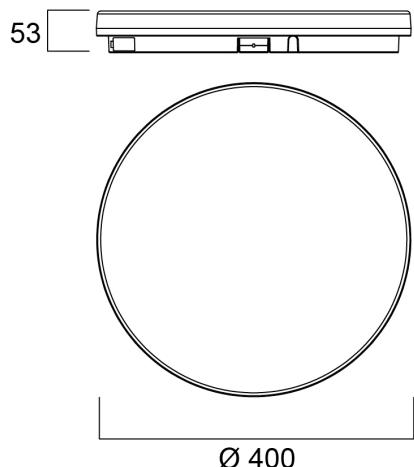

Light your world