


Features

- Onetrack - 3 circuit track + 2 circuit control L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC, DALI, DMX, 1-10V etc. compatible, circuits can be controlled individually, aluminum body, suitable for surface and suspended mounting, 1000 x 30.7 x 37.8 mm (L x W x H), white (RAL 9010).

Product Overview

| | |
|---------------------|--------------------------------|
| Product name | ONETRACK 1M WHITE 9000A-1/W-ST |
| Technology | Accessory |
| Housing | Aluminium |
| General application | Museums & Galleries, Office |
| ETIM Class | EC000101 |
| Housing colour | White |
| Warranty | 5 years |

Technical drawings

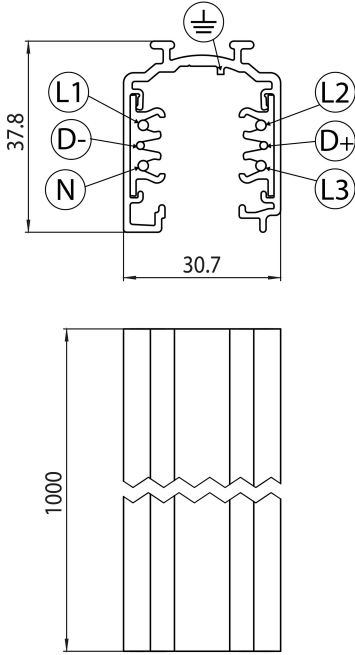

Data table

GENERAL DATA

| | |
|---------------------|--------------------------------|
| Product name | ONETRACK 1M WHITE 9000A-1/W-ST |
| Technology | Accessory |
| Housing | Aluminium |
| General application | Museums & Galleries, Office |
| ETIM Class | EC000101 |
| Warranty | 5 years |

ELECTRICAL DATA

| | |
|-----------------------|----|
| Control gear required | No |
|-----------------------|----|

ONETRACK 1M WHITE 9000A-1/W-ST 9200501

PHYSICAL DATA

| | |
|-----------------------------|-------|
| Housing colour | White |
| Nominal Product Length (mm) | 1000 |
| Nominal Product Width (mm) | 30.7 |
| Nominal Product Height (mm) | 37.8 |
| Weight (kg) | 0.84 |

PACKAGING

| | |
|---------------------------------------|---------|
| Single packaging type | Plastic |
| Packaging single length / height (cm) | 106.0 |
| Packaging single width (cm) | 3.3 |
| Packaging single depth (cm) | 3.5 |
| Units per outer package | 138 |
| Packaging outer length / height (cm) | 110.0 |
| Packaging outer width (cm) | 80.0 |
| Packaging outer depth (cm) | 50.0 |

SAFETY DATA

| | |
|-------------------------------------|----|
| Special purpose lamp | No |
| Dry applications use only | No |
| Suitable for household illumination | No |