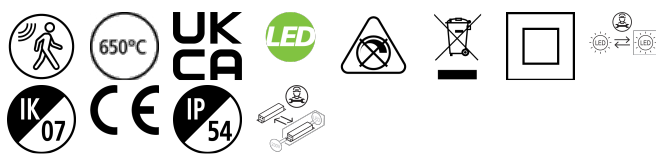


Start Surface Slim IP54 - Round Sensor
START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
0043514



PRODUCT OVERVIEW

Product name	START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
E-number FI	4278450
Warranty	3 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	105
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM4
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07
Product EAN number	5410288435145

DATA TABLE

General data	
Product name	START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25

Start Surface Slim IP54 - Round Sensor

START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH

0043514

E-number FI	4278450
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	105
Correlated colour temperature range (K)	3000 - 4000
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM4
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	18
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	LED driver constant current
Drive current (mA)	480
Inrush Current (A)	4.5
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	65000
Lifespan L80 B50	42000
Lifespan L90 B50	21000

Physical data

Housing colour	White
IP rating	IP54
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	280
Weight (kg)	0.957

Packaging

Single packaging type	Carton
Product EAN number	5410288435145
Packaging single width (cm)	5.8
Packaging single depth (cm)	28.7

Start Surface Slim IP54 - Round Sensor

START SURFACE SLIM IP54 ROUND 1900LM 2CCT MW WH

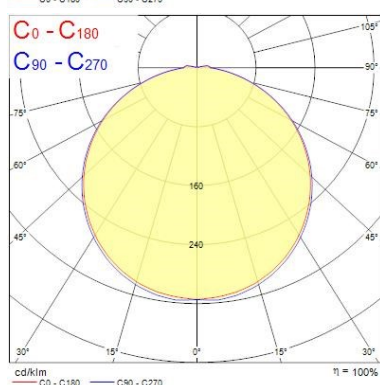
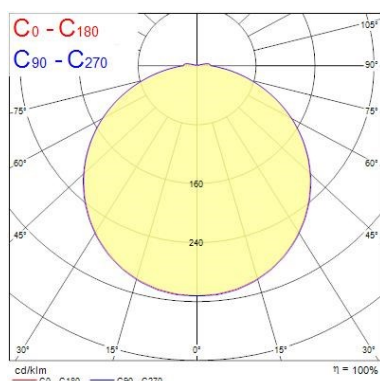
0043514

DUN14 (outer)	15410288435142
Packaging outer length / height (cm)	37.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

[illegible][illegible]

TECHNICAL DRAWINGS

