


Features

- Onetrack - 3 circuit track + 2 circuit control L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC, DALI, DMX, 1-10V etc. compatible, circuits can be controlled individually, aluminum body, suitable for surface and suspended mounting, 2000 x 30.7 x 37.8 mm (L x W x H), white (RAL 9010).

Product Overview

Product name	ONETRACK 2M WHITE 9000A-2/W-ST
Technology	Accessory
Housing	Aluminium
General application	Museums & Galleries, Office
ETIM Class	EC000101
Housing colour	White
Warranty	5 years

Technical drawings

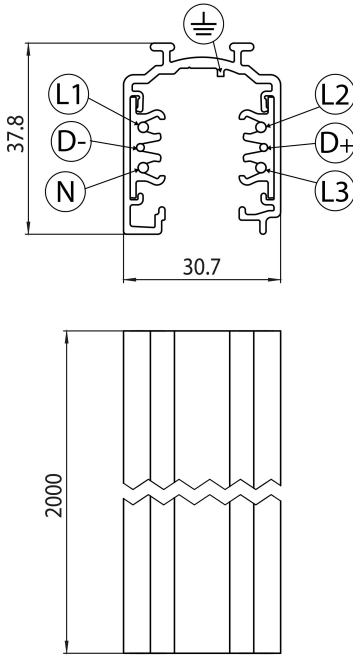

Data table

GENERAL DATA

Product name	ONETRACK 2M WHITE 9000A-2/W-ST
Technology	Accessory
Housing	Aluminium
General application	Museums & Galleries, Office
ETIM Class	EC000101
Warranty	5 years

ELECTRICAL DATA

Control gear required	No
-----------------------	----

ONETRACK 2M WHITE 9000A-2/W-ST 9200502

PHYSICAL DATA

Housing colour	White
Nominal Product Length (mm)	2000
Nominal Product Width (mm)	30.7
Nominal Product Height (mm)	37.8
Weight (kg)	1.68

PACKAGING

Single packaging type	Plastic
Packaging single length / height (cm)	206.0
Packaging single width (cm)	3.3
Packaging single depth (cm)	3.5
Units per outer package	138
Packaging outer length / height (cm)	210.0
Packaging outer width (cm)	80.0
Packaging outer depth (cm)	50.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No