


Start Surface Slim IP54 - Square
START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH
0043517




PRODUCT OVERVIEW

Product name	START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
E-number FI	4278401
Warranty	3 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	105
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM4
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07
Product EAN number	5410288435176

PHOTOMETRY

Start Surface Slim IP54 - Square
START SURFACE SLIM IP54 SQUARE 1900LM 2CCT D WH
0043517

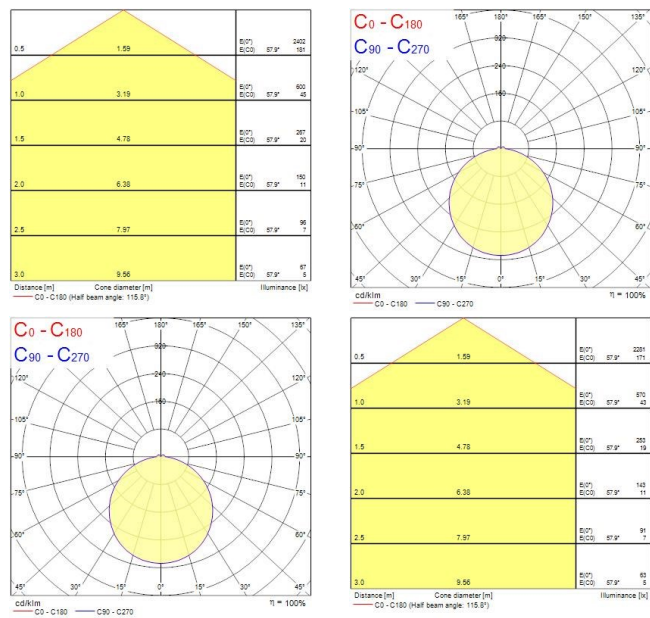

TECHNICAL DRAWINGS

