
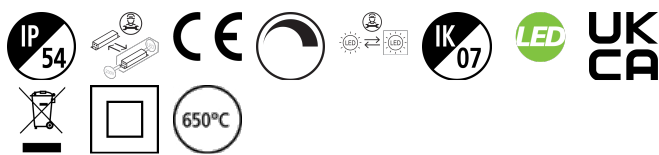


Start Surface Slim IP54 - Square
START SURFACE SLIM IP54 SQUARE 4000LM 2CCT D WH
0043519




PRODUCT OVERVIEW

Product name	START SURFACE SLIM IP54 SQUARE 4000LM 2CCT D WH
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
E-number FI	4278403
Warranty	3 years
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	114
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM4
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP54
IK rating	IK07
Product EAN number	5410288435190

PHOTOMETRY

Start Surface Slim IP54 - Square
START SURFACE SLIM IP54 SQUARE 4000LM 2CCT D WH
0043519

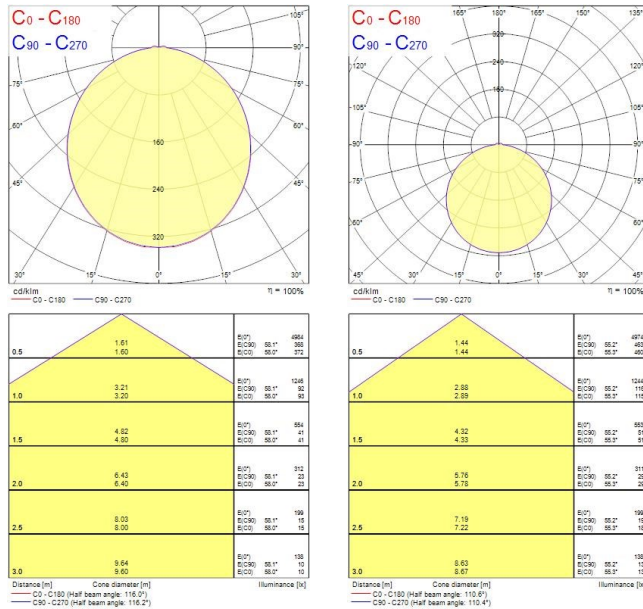

TECHNICAL DRAWINGS

