


### Features

- Onetrack - 3 circuit track + 2 circuit control L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC, DALI, DMX, 1-10V etc. compatible, circuits can be controlled individually, aluminum body, suitable for surface and suspended mounting, 1000 x 30.7 x 37.8 mm (L x W x H), black (RAL 9005).

### Product Overview

Product name	ONETRACK 1M BLACK 9000A-1/B-ST
Technology	Accessory
Housing	Aluminium
General application	Museums & Galleries, Office
ETIM Class	EC000101
Housing colour	Black
Warranty	5 years

### Technical drawings

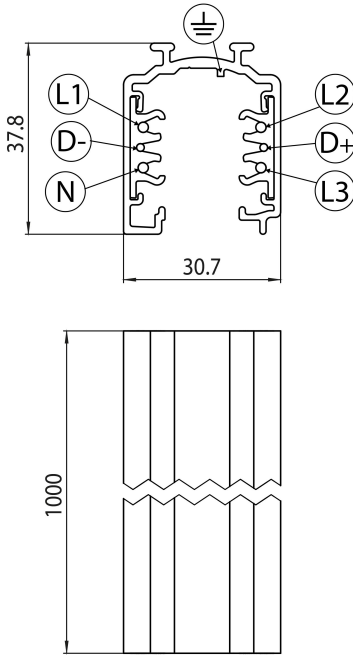

### Data table

#### GENERAL DATA

Product name	ONETRACK 1M BLACK 9000A-1/B-ST
Technology	Accessory
Housing	Aluminium
General application	Museums & Galleries, Office
ETIM Class	EC000101
Warranty	5 years

#### ELECTRICAL DATA

Control gear required	No
-----------------------	----

## ONETRACK 1M BLACK 9000A-1/B-ST 9200505

### PHYSICAL DATA

Housing colour	Black
Nominal Product Length (mm)	1000
Nominal Product Width (mm)	30.7
Nominal Product Height (mm)	37.8
Weight (kg)	0.84

### PACKAGING

Single packaging type	Plastic
Packaging single length / height (cm)	106.0
Packaging single width (cm)	3.3
Packaging single depth (cm)	3.5
Units per outer package	138
Packaging outer length / height (cm)	110.0
Packaging outer width (cm)	80.0
Packaging outer depth (cm)	50.0

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No