

Features

- Ceiling recessed luminaire, dimensions: 595 x 595 x 52mm, white (RAL9016) coated body, satin aluminium reflector (double symmetrical light distribution), for 3 x Helios LED T5 lamps (lamps not included), DALI dimmable LED driver, low LED flicker (+/-5%), 150mA drive current, push-in connector, IP20, IK07


Product Overview

Product name	RANA HELIOS R 600 3L LOUV+PRI DALI
Technology	LED
Cap/Base	G5
Housing	Steel
Mount	Ceiling recessed mounting
Light source included	Fixture without Lightsource
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	145
Correlated colour temperature (k)	4000
Light colour	N/A
CRI (Ra)	85
Colour Variation Initial (SDCM)	3
Beam Angle (°)	46
Glare control	< 19

RANA HELIOS R 600 3L LOUV+PRI DALI 0044991

Photobiological Risk Group	RG1
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288449913
Warranty	5 years
Dimming method	DALI

Photometry

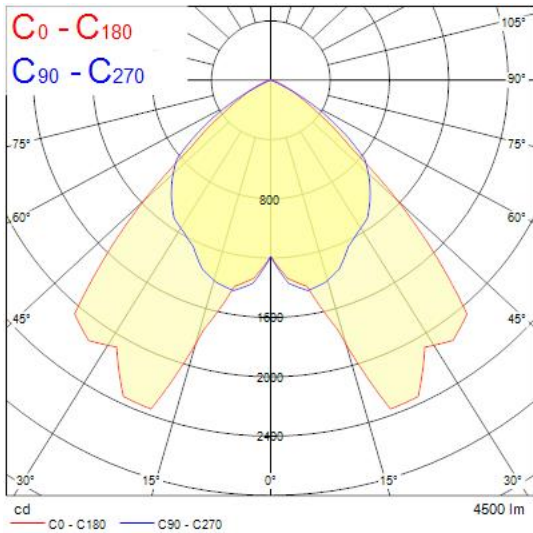

Technical drawings

