

Rana Helios 600

RANA HELIOS R 600 2L LOUV+PRI
0044994



Product features

- Ceiling recessed luminaire, dimensions: 595 x 595 x 52mm, white (RAL9016) coated body, satin aluminium reflector (double symmetrical light distribution), for 2 x Helios LED T5 lamps (lamps not included), constant current LED driver, low LED flicker (+/-5%), 150mA drive current, push-in connector, IP20, IK07




PRODUCT OVERVIEW

| | |
|-----------------------------------|----------------------------------|
| Product name | RANA HELIOS R 600 2L LOUV+PRI |
| Technology | LED |
| Cap/Base | G5 |
| Housing | Steel |
| Mount | Ceiling recessed mounting |
| General application | Education, Office |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 3100 |
| Luminaire efficacy (lm/W) | 141 |
| Correlated colour temperature (k) | 4000 |
| Light colour | N/A |
| CRI (Ra) | 85 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 46 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Light source included | Fixture without Lightsource |
| Total power consumption (W) | 22 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| Housing colour | RAL 9016 - Traffic white / Bezel |
| IP rating | IP20 |
| IK rating | IK07 |
| Product EAN number | 5410288449944 |

Rana Helios 600

RANA HELIOS R 600 2L LOUV+PRI
0044994

PHOTOMETRY

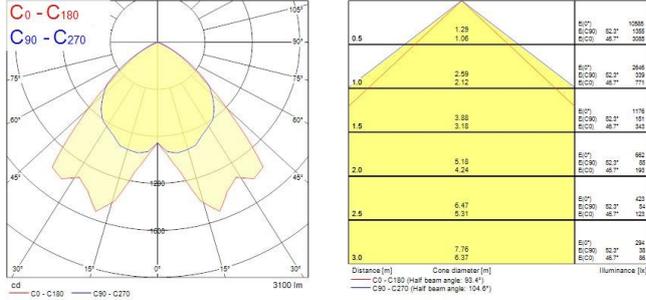

TECHNICAL DRAWINGS

