



### Features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 853lm, 10W, 85lm/W, 3000K, 500mA, 85 CRI, non-dimmable, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V


### Product Overview

|                             |                                 |
|-----------------------------|---------------------------------|
| Product name                | GLACE 853LM HIGH EFFICIENCY 830 |
| Technology                  | LED                             |
| Cap/Base                    | N/A                             |
| Housing                     | Aluminium                       |
| Mount                       | Ceiling surface mounting        |
| Fixture rating              | Enclosed                        |
| Environment                 | Indoor                          |
| Luminaire efficacy (lm/W)   | 85.3                            |
| LOR (%)                     | 100                             |
| Colour temperature (K)      | 3000                            |
| Light colour                | Warm White                      |
| CRI (Ra)                    | 80                              |
| Colour Consistency (SDCM)   | 3                               |
| Glare control               | < 18                            |
| Total power consumption (W) | 10                              |
| Electrical protection       | Class I                         |
| IP rating                   | IP20                            |
| IK rating                   | IK02                            |
| Product EAN number          | 5025768597802                   |
| Warranty                    | 5 years                         |

# Concord

## GLACE 853LM HIGH EFFICIENCY 830 2059780

### Photometry

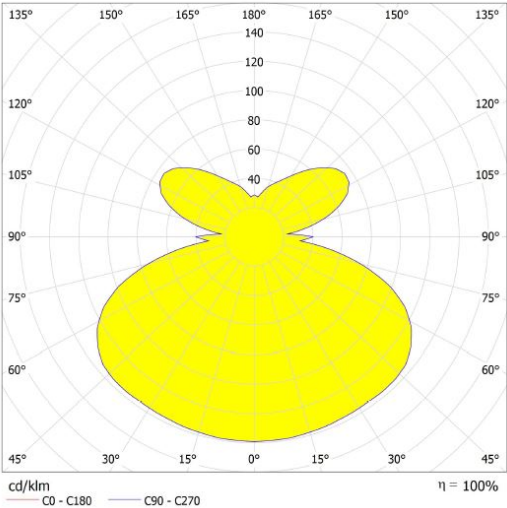

### Technical drawings

