



### Features

- Ceiling recessed luminaire, dimensions: 595 x 595 x 52mm, white (RAL9016) coated body, satin aluminium reflector (double symmetrical light distribution), for 3 x Helios LED T5 lamps (lamps not included), constant current LED driver, low LED flicker (+/-5%), 150mA drive current, push-in connector, IP20, IK07


### Product Overview

<b>Product name</b>	RANA HELIOS R 600 3L LOUV+PRI
<b>Technology</b>	LED
<b>Cap/Base</b>	G5
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Light source included</b>	Fixture without Lightsource
<b>General application</b>	Education, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	4500
<b>Luminaire efficacy (lm/W)</b>	145
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	N/A
<b>CRI (Ra)</b>	85
<b>Colour Variation Initial (SDCM)</b>	3
<b>Beam Angle (°)</b>	46
<b>Glare control</b>	< 19

## RANA HELIOS R 600 3L LOUVV+PRI 0044995

Photobiological Risk Group	RG1
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288449951
Warranty	5 years
Dimming method	N/A

### Photometry

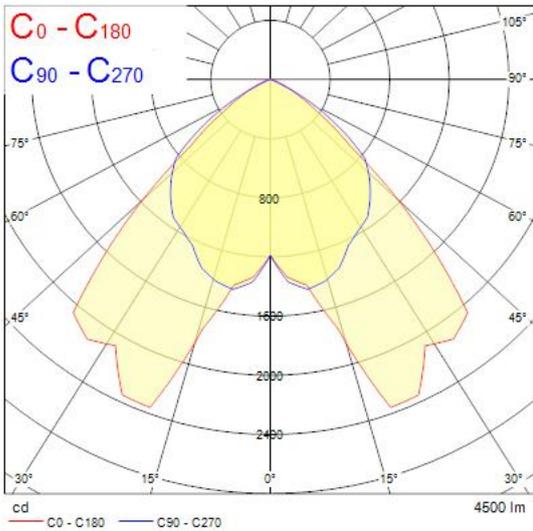

### Technical drawings

