


<input type="checkbox"/> 제품명 (Product name)	제어회로용 스위치
<input type="checkbox"/> 기본모델 (Basic model)	NF22E-14
<input type="checkbox"/> 파생모델 (Derivative model)	



- Coil Configuration**
- | | |
|----|--------------------------------------|
| 11 | 20-60VDC / 24-60VAC |
| 12 | 48-130VAC/VDC |
| 13 | 100-250VAC/VDC |
| 14 | 250-500VAC/VDC |
| 41 | 24-60VAC |
| 21 | 20-60VDC / 24-60VAC, low consumption |
| 22 | 48-130VAC/VDC, low consumption |
| 23 | 100-250VAC/VDC, low consumption |
- Connection Type**
- "blank" screw terminals
 - S spring terminals
 - K push in terminals
 - RT terminals for ring lugs
- Contact Arrangement**
- E M N U
- Number of Aux. contacts**
- | | |
|----|-------------|
| 22 | 2NO and 2NC |
| 31 | 3NO and 1NC |
| 40 | 4NO and 0NC |
- Type of Material**
- "blank" standard material
 - B contactor for railway applications (special raw plastic)
- Type of Coil**
- "blank" standard consumption
 - Z low consumption

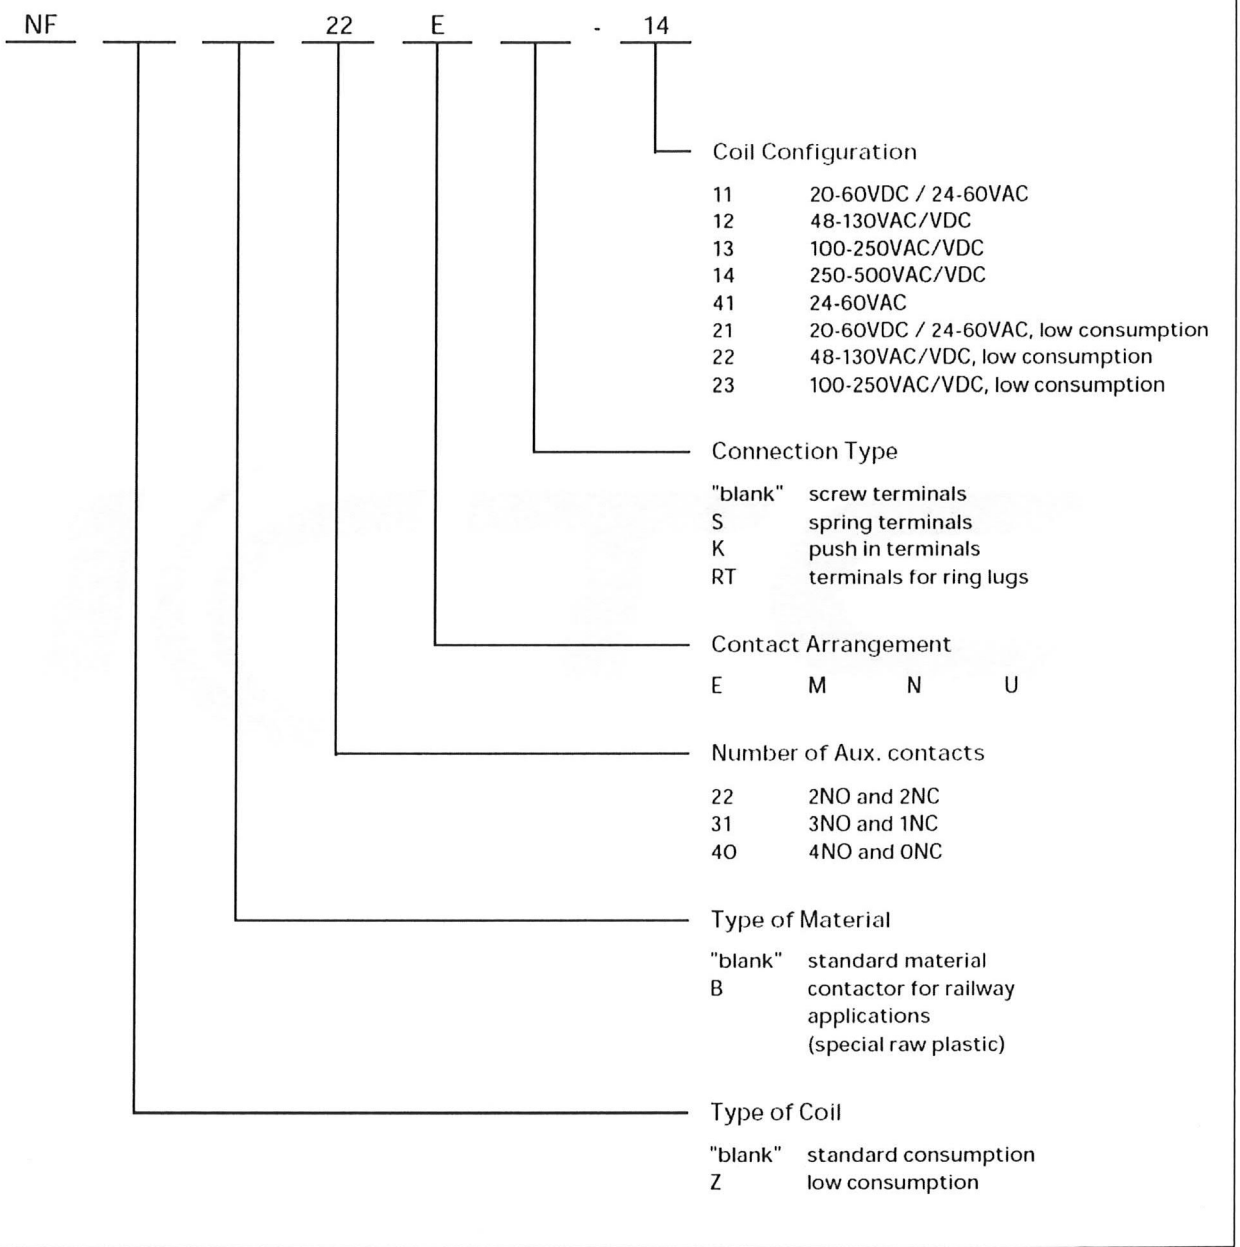