

Data Sheet | Item Number: 250-107/353-604



THR PCB terminal block; push-button; 1.5 mm²; Pin spacing 3.5 mm; 7-pole; Push-in CAGE CLAMP®; black

<https://www.wago.com/250-107/353-604>



Color: ■ black

Similar to illustration

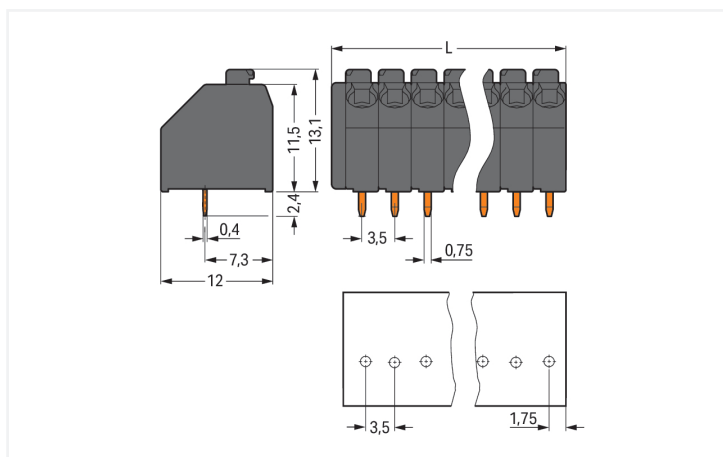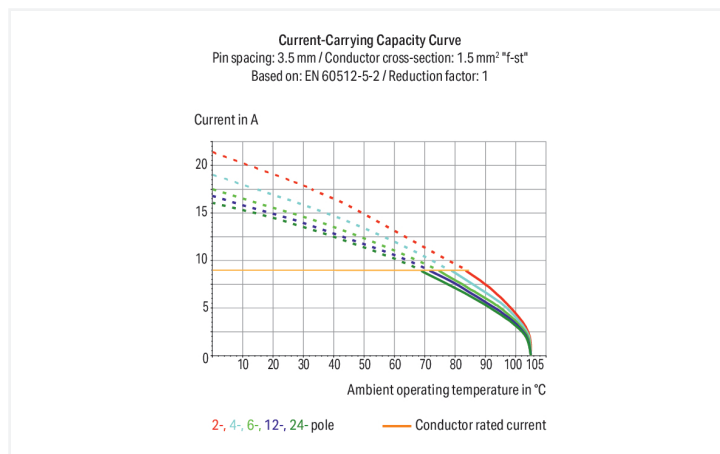

Dimensions in mm

L = (pole no. x pin spacing) + 1.5 mm

PCB terminal block, 250 Series, Push-in CAGE CLAMP®

This PCB terminal block (item number 250-107/353-604) is designed to connect conductors quickly and easily. It offers the flexibility needed for different mounting types. Strip lengths must be between 8.5 and 9.5 mm when connecting conductors to this PCB terminal block. This product features one conductor terminal and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for any type of conductor. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. The item's dimensions are (26 x 15.5 x 12) mm (width x height x depth). Depending on the type of conductor, this PCB terminal block is suitable for conductor cross sections ranging from 0.2 mm² to 1.5 mm². Tin is used for coating the contact surfaces. A push-button is used to operate this PCB terminal block. The PCB terminal block is designed for THR soldering. Insert the conductor at an angle of 45°.



Notes	
Note	Application notes: Suitable for lead-free, reflow-soldering profiles per DIN EN 61760-1 and IEC 60068-2-58 up to max. 260°C peak temperature. Due to application-specific variables (component configuration and orientation, type of soldering machine, solder paste), trial runs are recommended to ensure product and process compatibility under actual manufacturing conditions.
Variants:	Other pole numbers Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data								
Ratings per		IEC/EN 60664-1			Approvals per		UL 1059	
Overvoltage category	III	III	II		Use group	B	C	D
Pollution degree	3	2	2		Rated voltage	300 V	-	300 V
Nominal voltage	200 V	320 V	320 V		Rated current	8 A	-	5 A
Rated impulse withstand voltage	4 kV	4 kV	4 kV					
Rated current	8 A	8 A	8 A					
Approvals per		CSA						
Use group	B	C	D					
Rated voltage	300 V	-	300 V					
Rated current	10 A	-	10 A					

Connection Data																												
Clamping units	7	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Push-button</td></tr><tr><td>Solid conductor</td><td>0.2 ... 1.5 mm² / 24 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.2 ... 1.5 mm² / 24 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 1 mm²</td></tr><tr><td></td><td></td><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 1 mm²</td></tr><tr><td></td><td></td><td>Strip length</td><td>8.5 ... 9.5 mm / 0.33 ... 0.37 inches</td></tr><tr><td></td><td></td><td>Conductor connection direction to PCB</td><td>45 °</td></tr><tr><td></td><td></td><td>Pole number</td><td>7</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Push-button	Solid conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG	Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 1 mm²			Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1 mm²			Strip length	8.5 ... 9.5 mm / 0.33 ... 0.37 inches			Conductor connection direction to PCB	45 °			Pole number	7
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Push-button																											
Solid conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG																											
Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 1 mm²																											
		Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1 mm²																									
		Strip length	8.5 ... 9.5 mm / 0.33 ... 0.37 inches																									
		Conductor connection direction to PCB	45 °																									
		Pole number	7																									
Total number of potentials	7																											
Number of connection types	1																											
Number of levels	1																											

Physical data	
Pin spacing	3.5 mm / 0.138 inches
Width	26 mm / 1.024 inches
Height	15.5 mm / 0.61 inches
Height from the surface	13.1 mm / 0.516 inches
Depth	12 mm / 0.472 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.4 x 0.75 mm



PCB contact		
PCB contact		THR
Solder pin arrangement		over the entire terminal strip (staggered)
Number of solder pins per potential		1

Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Material group		IIIa
Insulation material (main housing)		Polyamide (PA46)
Flammability class per UL94		V2
Clamping spring material		Copper alloy
Contact Plating		Tin
Fire load		0.076 MJ
Weight		3.4 g
MSL per J-STD 020D		1

Environmental requirements		
Limit temperature range		-60 ... +105 °C

Commercial data		
PU (SPU)		180 (45) pcs
Packaging type		Box
Country of origin		CH
GTIN		4055143243384
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-01
eCl@ss 9.0		27-44-04-01
ETIM 9.0		EC002643
ETIM 10.0		EC002643
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
DEKRA DEKRA Certification B.V.	EN 60947-7-4	71-141963
UR Underwriters Laboratories Inc.	UL 1059	E 45172

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance

250-107/353-604

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

pdf

535.32 KB

↓

CAD/CAE-Data

PCB Design

Symbol and Footprint via SamacSys

250-107/353-604

↓

Symbol and Footprint via Ultra Librarian

250-107/353-604

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



[Item No.: 216-241](#)

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



[Item No.: 216-141](#)

Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



[Item No.: 216-242](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-262](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-142](#)

Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



[Item No.: 216-243](#)

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-263](#)

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-143](#)

Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 210-332/350-202
Marking strips; as a DIN A4 sheet; MARKED; 1-16 (240x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-332/350-204
Marking strips; as a DIN A4 sheet; MARKED; 17-32 (240x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-332/350-206
Marking strips; as a DIN A4 sheet; MARKED; 33-48 (240x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.1.3 Test and measurement

1.1.3.1 Testing accessories



Item No.: 735-500
WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 6 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.4 Tool

1.1.4.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-657
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured


Installation Notes

Conductor termination



Inserting solid conductors via push-in termination.
Inserting fine-stranded conductors via push-buttons, 250 Series – 3.5 mm pin spacing.

Conductor termination




Space-saving wiring, 250 Series – 5 mm pin spacing.

Testing




Testing with 11 mm Ø test pin, on the conductor, 250 Series – 2.5 ... 3.5 mm pin spacing.




Testing with 2 mm Ø test plug, touch contact, 250 Series – 5 mm pin spacing.

Marking



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.