


Data Sheet | Item Number: 256-856


Stackable PCB terminal block; push-button; 2.5 mm²; Pin spacing 7.5/7.62 mm; 1-pole; CAGE CLAMP®; commoning option; orange

<https://www.wago.com/256-856>

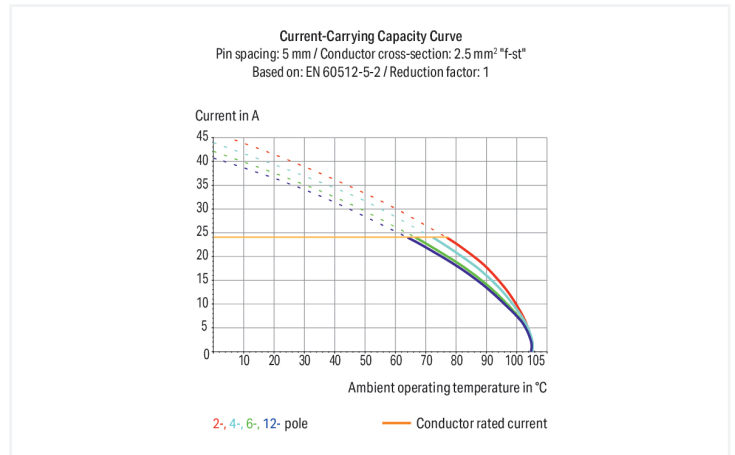

Color: ■ orange

Similar to illustration

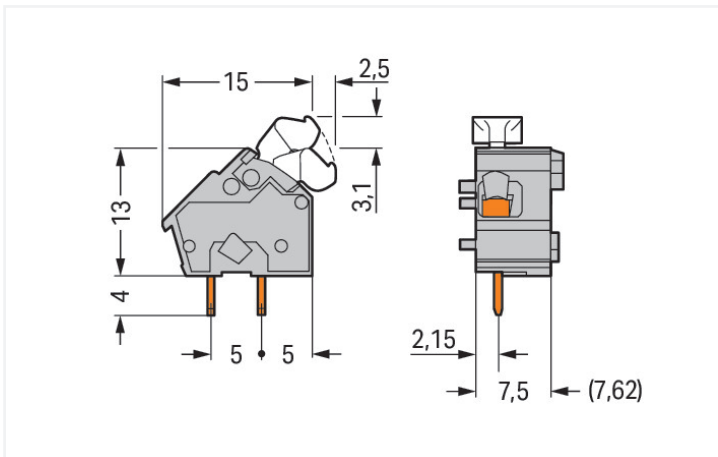

Dimensions in mm

PCB terminal block, 256 Series, 45 °conductor entry to board

This PCB terminal block (item number 256-856) is designed to connect conductors quickly and easily. You can count on tried and tested safety with these PCB terminal blocks, perfect for a wide range of applications when designing your devices. Ensure that the strip lengths are between 5 and 6 mm when connecting conductors to this PCB terminal block. This product features one conductor terminal and utilizes CAGE CLAMP®. Our CAGE CLAMP® connection offers a secure and maintenance-free way to connect all types of conductors. You do not need to prepare the conductor in any way, such as crimping ferrules. The item's dimensions are (10.3 x 20.1 x 17.2) mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.08 mm² to 2.5 mm².

The contact surface is coated with tin. Push-button (angled) is used to operate this PCB terminal block. THT is used to assemble the PCB terminal block. Insert the conductor at a 45° angle..



Notes	
Variants:	Other colors Versions for Ex e II and Ex i Solder pin length: 5.5 mm Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		320 V	320 V	630 V
Rated impulse withstand voltage		4 kV	4 kV	4 kV
Rated current		24 A	24 A	24 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		300 V	-	300 V
Rated current		15 A	-	10 A
Approvals per		CSA		
Use group		B	C	D
Rated voltage		300 V	-	300 V
Rated current		15 A	-	10 A

Connection data																						
Clamping units	1	Connection 1 <table><tr><td>Connection technology</td><td>CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Push-button (angled)</td></tr><tr><td>Solid conductor</td><td>0.08 ... 2.5 mm² / 28 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.08 ... 2.5 mm² / 28 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 1.5 mm²</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 1.5 mm²</td></tr><tr><td>Note (conductor cross-section)</td><td>12 AWG: THHN, THWN</td></tr><tr><td>Strip length</td><td>5 ... 6 mm / 0.2 ... 0.24 inches</td></tr><tr><td>Conductor connection direction to PCB</td><td>45 °</td></tr><tr><td>Pole number</td><td>1</td></tr></table>	Connection technology	CAGE CLAMP®	Actuation type	Push-button (angled)	Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm²	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm²	Note (conductor cross-section)	12 AWG: THHN, THWN	Strip length	5 ... 6 mm / 0.2 ... 0.24 inches	Conductor connection direction to PCB	45 °	Pole number	1
Connection technology	CAGE CLAMP®																					
Actuation type	Push-button (angled)																					
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG																					
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG																					
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm²																					
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm²																					
Note (conductor cross-section)	12 AWG: THHN, THWN																					
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches																					
Conductor connection direction to PCB	45 °																					
Pole number	1																					
Total number of potentials	1																					
Number of connection types	1																					
Number of levels	1																					

Physical data	
Pin spacing	7.5/7.62 mm / 0.295/0.3 inches
Width	10.3 mm / 0.406 inches
Height	20.1 mm / 0.791 inches
Height from the surface	16.1 mm / 0.634 inches
Depth	17.2 mm / 0.677 inches
Solder pin length	4 mm
Solder pin dimensions	0.7 x 0.7 mm
Drilled hole diameter with tolerance	1.1 (+0.1) mm



PCB contact		
PCB contact		THT
Solder pin arrangement		within the terminal block (in-line)
Number of solder pins per potential		2

Material data		
Note (material data)		Information on material specifications can be found here
Color		orange
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.026 MJ
Weight		1.2 g

Environmental requirements		
Limit temperature range		-60 ... +105 °C

Commercial data		
PU (SPU)		400 (100) pcs
Packaging type		Box
Country of origin		CH
GTIN		4055143659512
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-01
eCl@ss 9.0		27-44-04-01
ETIM 9.0		EC002643
ETIM 10.0		EC002643
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
  			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	IEC 60947-7-4	71-113042	DNV DNV GL SE	-	TAE000016Z
CSA DEKRA Certification B.V.	C22.2 No. 158	70049157	PRS Polski Rejestr Statków	-	TE/1095/880590/23
UL Underwriters Laboratories Inc.	UL 1059	20190731-E45172			

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 256-856

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

Gebrückte Klemmen-leisten für Leiterplatten

pdf

303.71 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 256-856

↓

CAE data

ZUKEN Portal 256-856

↓

PCB Design

Symbol and Footprint via SamacSys 256-856

↓

Symbol and Footprint via Ultra Librarian 256-856

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate



[Item No.: 256-800](#)
End plate; snap-fit type; 1 mm thick; black



[Item No.: 256-400](#)
End plate; snap-fit type; 1 mm thick; blue



[Item No.: 256-200](#)
End plate; snap-fit type; 1 mm thick; dark gray



[Item No.: 256-100](#)
End plate; snap-fit type; 1 mm thick; gray



[Item No.: 256-300](#)
End plate; snap-fit type; 1 mm thick; light gray



[Item No.: 256-700](#)
End plate; snap-fit type; 1 mm thick; light green



[Item No.: 256-600](#)
End plate; snap-fit type; 1 mm thick; orange




[Item No.: 256-500](#)
End plate; snap-fit type; 1 mm thick; red

Installation Notes


Conductor termination




Inserting/removing a conductor – 256 Series.



Inserting/removing a conductor (255 Series)



Inserting/removing a conductor via finger-operated lever – 255 Series.




Inserting/removing a conductor via finger-operated lever – 256 Series.

Installation




Possible conductor arrangement with terminal strips staggered (for 256 Series only).

Marking



Formation of groups using housings of different colors

Testing



Testing with test probes.



Testing with test plug modules.