

# Product Environmental Profile

Earth-leakage relays: VIGIREX RH10P to RH99P with associated sensors




## General information

Reference product	Earth-leakage relays: VIGIREX RH10P to RH99P with associated sensors - 56273+ 50440
Description of the product	The Vigirex RH10P to RH99P range of earth leakage protection relays with associated sensors, Which is designed to detect and measure the earth leakage current in an electrical installation. The relays interrupt the supply of power to the supervised network and protect the personnel against direct and indirect contact; they also protect property against fire hazards.  The representative product used for the study is the Vigirex RH99P earth leakage protection relay with an MA120 toroid sensor.
Functional unit	Protect during 10 years people and premises at risk of fire or explosion with assigned voltage 220-240V by detecting and measuring the earth leakage current sensitivity is selectable with 9 thresholds from 30 mA to 30 A.

## Constituent materials

Reference product mass	1096.72 g including the product, its packaging and additional elements and accessories
------------------------	----------------------------------------------------------------------------------------

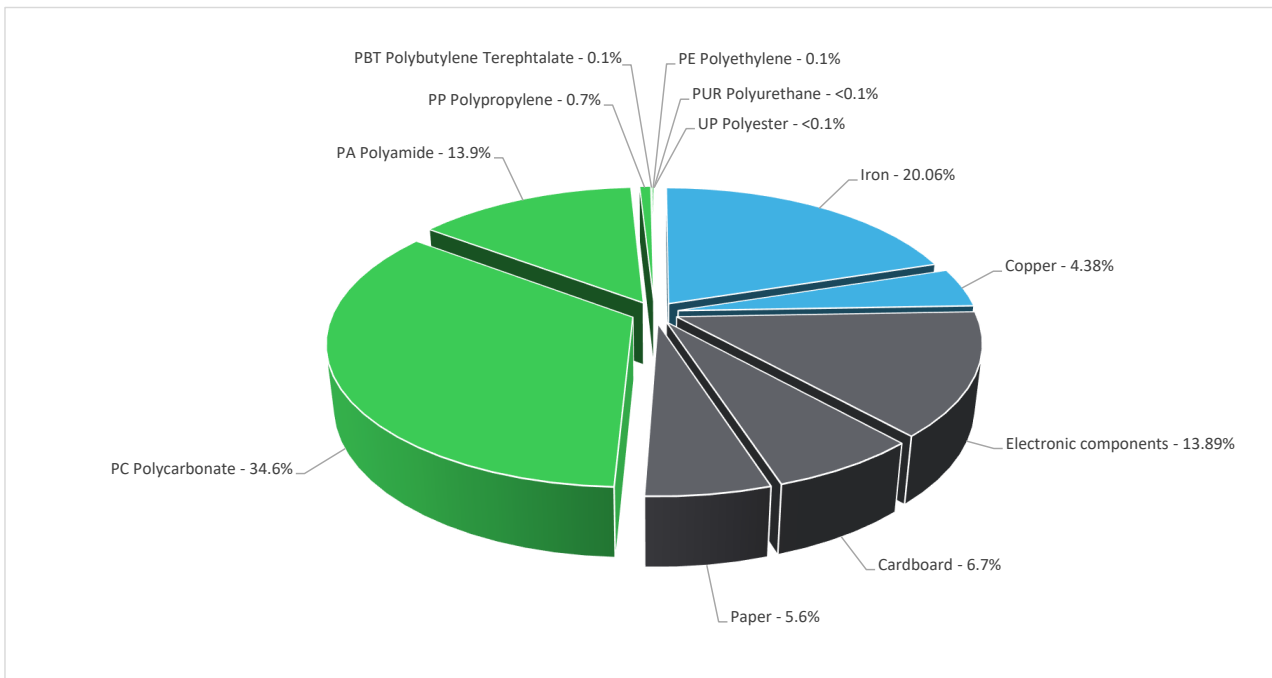

Plastics	49.4%
Metals	24.4%
Others	26.2%

## Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website  
<https://www.se.com/ww/en/work/support/green-premium/>

## Additional environmental information

End Of Life	Recyclability potential:	27%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


**Environmental impacts**

Reference service life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed during installation phase. The disposal of the packaging material is accounted for during this phase (Including transport to disposal).			
Use scenario	The product is in active mode 5% of the time with power use of 1.1W & in sleep mode 95% with 1.3W for 10 years			
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.			
Geographical representativeness	Europe			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; FR	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		Earth-leakage relays: VIGIREX RH10P to RH99P with associated sensors - 56273+ 50440						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	5.86E+01	9.19E+00	1.43E-01	2.39E-01	4.63E+01	2.68E+00	-1.17E+00
Contribution to climate change-fossil	kg CO2 eq	5.71E+01	7.83E+00	1.43E-01	2.29E-01	4.63E+01	2.65E+00	-1.20E+00
Contribution to climate change-biogenic	kg CO2 eq	1.46E+00	1.36E+00	0*	1.06E-02	6.18E-02	2.42E-02	2.83E-02
Contribution to climate change-land use and land use change	kg CO2 eq	1.72E-07	2.64E-09	0*	6.08E-09	0*	1.63E-07	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	1.10E-06	8.53E-07	2.20E-10	1.59E-08	1.98E-07	3.03E-08	-3.43E-07
Contribution to acidification	mol H+ eq	3.40E-01	6.31E-02	9.22E-04	9.50E-04	2.64E-01	1.11E-02	-1.37E-02
Contribution to eutrophication, freshwater	kg (PO4) <sup>3-</sup> eq	5.29E-04	4.77E-05	5.37E-08	1.76E-06	1.27E-04	3.52E-04	-4.08E-06
Contribution to eutrophication marine	kg N eq	4.50E-02	8.32E-03	4.33E-04	2.52E-04	3.00E-02	5.96E-03	-7.81E-04
Contribution to eutrophication, terrestrial	mol N eq	5.58E-01	8.97E-02	4.75E-03	1.90E-03	4.51E-01	1.06E-02	-8.20E-03
Contribution to photochemical ozone formation - human health	kg COVMN eq	1.31E-01	2.92E-02	1.20E-03	5.08E-04	9.64E-02	3.41E-03	-3.36E-03
Contribution to resource use, minerals and metals	kg Sb eq	9.77E-04	9.64E-04	0*	0*	3.36E-06	9.80E-06	-2.12E-04
Contribution to resource use, fossils	MJ	1.40E+03	1.65E+02	2.00E+00	2.49E+00	1.18E+03	5.01E+01	-1.49E+01
Contribution to water use	m3 eq	9.73E+01	6.08E-01	0*	1.04E-01	1.64E+00	9.49E+01	-8.23E-01

*Additional indicators for the French regulation are available as well*

Inventory flows Indicators		Earth-leakage relays: VIGIREX RH10P to RH99P with associated sensors - 56273+ 50440						
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Loads and Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.29E+02	1.87E+00	0*	1.80E-01	2.27E+02	6.53E-01	5.99E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	4.88E-01	4.88E-01	0*	0*	0*	0*	-5.11E-01
Contribution to total use of renewable primary energy resources	MJ	2.30E+02	2.35E+00	0*	1.80E-01	2.27E+02	6.53E-01	8.85E-02
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.39E+03	1.52E+02	2.00E+00	2.49E+00	1.18E+03	5.01E+01	-1.51E+01
Contribution to use of non renewable primary energy resources used as raw material	MJ	1.36E+01	1.36E+01	0*	0*	0*	0*	2.38E-01
Contribution to total use of non-renewable primary energy resources	MJ	1.40E+03	1.65E+02	2.00E+00	2.49E+00	1.18E+03	5.01E+01	-1.49E+01
Contribution to use of secondary material	kg	1.28E-01	1.28E-01	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	2.54E+00	1.42E-02	0*	2.41E-03	3.82E-02	2.48E+00	-1.92E-02
Contribution to hazardous waste disposed	kg	1.16E+01	9.76E+00	0*	2.83E-03	8.65E-01	9.77E-01	-1.65E+01
Contribution to non hazardous waste disposed	kg	1.15E+01	3.44E+00	5.03E-03	7.78E-01	6.66E+00	5.89E-01	-2.45E+00
Contribution to radioactive waste disposed	kg	3.20E-03	1.67E-03	3.58E-06	1.04E-04	1.39E-03	2.54E-05	-2.77E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	3.95E-01	0*	0*	1.32E-01	0*	2.63E-01	0.00E+00
Contribution to materials for energy recovery	kg	1.37E-08	1.37E-08	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00


\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

The use phase has the greatest impacts contribution on the majority of environmental indicators, except for Climate change-Biogenic (PEF-GWPb), Climate change-Land use and land use change (PEF-GWPlu), Ozone depletion (PEF-ODP), Eutrophication, freshwater (PEF-Epf), Resource use, minerals and metals (PEF-ADPe) and Water use (PEF-WU). This contribution is mainly due to the energy consumption throughout the product reference service lifetime

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-01101-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-2016 03 29
Date of issue	12/2023	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal                                  External    X			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.se.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 928 298 512 €

[www.se.com](http://www.se.com)

SCHN-01101-V01.01-EN

Published by Schneider Electric  
©2023 - Schneider Electric – All rights reserved

12/2023