Profi line

FHF
FUNKE+HUSTER·FERNSIG

Indicating Light Profi Lux

Indicating light with 15 W incandescent lamp for inside and outside mounting

▶ One version for wall mounting and standing inside and outside mounting

▶ Protection degree IP 54

▶ Continuous operation

▶ Modular housing design

Application

With its modular, stylish housing the Indicating Light Profi Lux can be mounted on the wall or standing.
The indicating light is available with 6 different caps and 2 different standard housing colours. By design, the device conforms to protection degree IP 54 and is suited for inside and outside use.

Design

The modular housing design enables a variety of solutions with regard to design and function.
All housing parts are made of impact-resistant ABS.
The socket is equipped with a Ba 15d holder for an incandescent lamp of max. 15 W.
In addition to the standard housing colours, optional colours may be available, depending on the number of devices ordered.
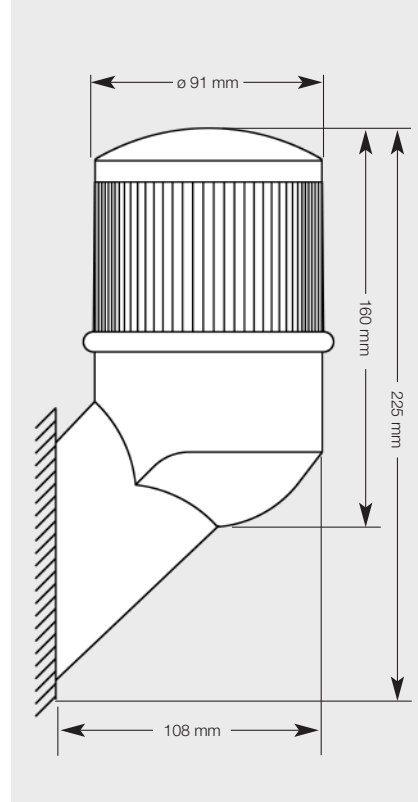
Alarm in modern Buildings

The modular housing design enables a variety of solutions with regard to design and function.

Technical specifications

Housing	ABS
Colour	white or grey (other colours on request)
Protection degree	IP 54
Protection class	II
Cable gland	Male thread bush M16 x 1.5
	for cable diameters from 6 to 8 mm
Connecting terminals	Clamping capacity 1.5 mm² fine-wire
Operating conditions	Inside or outside
Operating position	Any
Operating mode	Continuous operation
Light source	15 W incandescent lamp, Ba 15d
Temperature range	
Operating	-20°C to +40°C
Storage	-30°C to +80°C
Weight	Approx. 0.36 kg

ø 91 mm

160 mm

225 mm

108 mm

* The full article number is made up by appending the colour code for the coloured cap to the article numbers given below.

transparent	1
red	2
yellow	3
green	4
blue	5
amber	6

Order information

Type	Name	Rated voltage U$_e$	Tolerance	Light source	Art. no.	
Profi Lux	Indicating Light grey	230 VAC	+- 10 %	15 W	424 201 11	.
Profi Lux	Indicating Light white	230 VAC	+- 10 %	15 W	424 202 22	.
Profi Lux	Indicating Light grey	24 VDC	+- 10 %	15 W	424 101 11	.
Profi Lux	Indicating Light white	24 VDC	+- 10 %	15 W	424 102 22	.

Subject to change without notice · Printout 01/11