


# Data Sheet | Item Number: 787-1668/106-000

Electronic circuit breaker; 8-channel; 24 VDC input voltage; adjustable 1 ... 6 A; communication capability

<https://www.wago.com/787-1668/106-000>

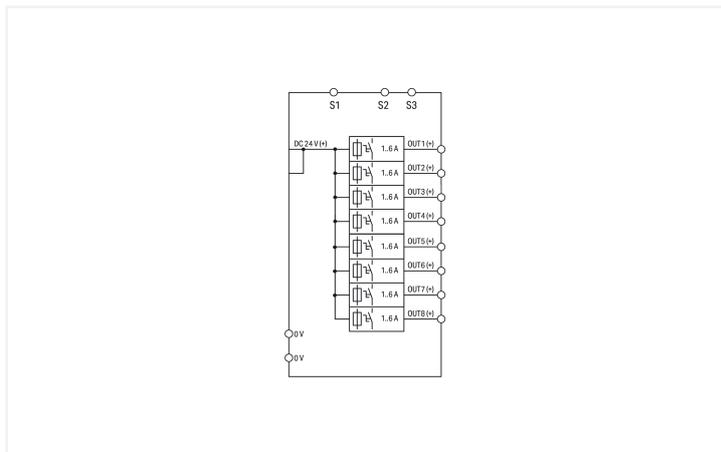

Similar to illustration

## Features:

- Space-saving ECB with eight channels
- Nominal current: 1 ... 6 A (adjustable for each channel via sealable selector switch)
- Switch-on capacity > 50000  $\mu$ F per channel
- One illuminated, three-colored button per channel simplifies switching (on/off), resetting, and on-site diagnostics
- Time-delayed switching of channels
- Tripped message (group signal)
- Status message for each channel via pulse sequence
- Remote input resets tripped channels or switches on/off any number of channels via pulse sequence

## Technical data

### Input

|   |               |
|---|---------------|
| Nominal input voltage $U_{i, \text{nom}}$ | 24 VDC        |
| Input voltage range                       | 18 ... 30 VDC |

### Output

|  |   |
|--|---|
| Total number of channels (module)          | 8   |
| Nominal output voltage $U_{o, \text{nom}}$ | 8 x 24 VDC  |
| Output voltage range                       | 18 ... 30 VDC ( $U_e$ - voltage drop)   |
| Voltage drop                               | $\leq 120$ mV (6 A) (Input (+))   |
| Nominal output current $I_{o, \text{nom}}$ | 8 x 1 / 2 / 3 / 4 / 5 / 6 A (adjustable for each channel via selector switch) |
| Default Setting                            | DC 6 A; switched on   |
| Trip time                                  | 16 ms ... 100 s (load-dependent)  |
| Switch-on capacity                         |   |
| Switch-on behavior                         | Time-delayed channel switching (load-dependent, min. 50 ms / max. 5 s)        |
| Active current limitation                  | No  |
| Current limitation                         | No  |

## Signaling and Communication

|                            |  |
|----------------------------|--|
| Signaling                  | 8 x LED (green/red/orange)<br>1 x Remote control input (S1)<br>2 x Active signal output (S2; S3) |
| Operation status indicator | Green LED (channel OK)<br>Red LED (tripped channel)  |

## Signaling and Communication

|              |  |
|--------------|--|
| Remote input | Reactivation of all tripped channels via 15 ... 30 VDC pulse for min. 500 ms<br>Switching on/off any number of channels via pulse sequence |
|--------------|--|

### Efficiency/Power Losses

|                   |   |
|-------------------|---|
| Power loss $P_1$  | $\leq 1.32 \text{ W}; \leq 8 \text{ W (8 x 6 A)}$ |
| Efficiency (typ.) | 99 %  |

### Circuit Protection

|               |                    |
|---------------|--------------------|
| Internal fuse | T 15 A per channel |
|---------------|--------------------|

### Safety and protection

|  |                             |
|--|-----------------------------|
| Isolation voltage (connectors – housing) | 0.5 kVDC                    |
| Protection class                         | III                         |
| Protection type                          | IP20; per EN 60529          |
| Reverse voltage protection               | No                          |
| Resistance to reverse feed               | $\leq 35 \text{ VDC}$       |
| Pollution degree                         | 2                           |
| Transient suppression (primary)          | Suppressor diode (33 V)     |
| Parallel operation of single channels    | Not permitted               |
| Series operation                         | No                          |
| MTBF                                     | > 500,000 h (per IEC 61709) |

### Connection Data

#### Connection 1

|                         |   |
|-------------------------|---|
| Connection type         | Input (+)                                 |
| Connection technology   | Push-in CAGE CLAMP®                       |
| WAGO connector          | WAGO 831 Series                           |
| Solid conductor         | 0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG |
| Fine-stranded conductor | 0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG |
| Strip length            | 13 ... 15 mm / 0.51 ... 0.59 inches       |

#### Connection 2

|                         |  |
|-------------------------|--|
| Connection type         | Input (-); output; signaling                 |
| Connection technology   | CAGE CLAMP®                                  |
| WAGO connector          | WAGO 721 Series                              |
| Solid conductor         | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG |
| Strip length            | 8 ... 9 mm / 0.31 ... 0.35 inches            |

### Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 42 mm / 1.654 inches   |
| Height                            | 127 mm / 5 inches      |
| Depth from upper-edge of DIN-rail | 142.5 mm / 5.61 inches |

### Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material data

|           |       |
|-----------|-------|
| Fire load | 0 MJ  |
| Weight    | 490 g |

### Environmental requirements

|                                 |  |
|---------------------------------|--|
| Ambient temperature (operation) | -25 ... +70 °C                           |
| Ambient temperature (storage)   | -25 ... +85 °C                           |
| Relative humidity               | 5 ... 96 % (no condensation permissible) |
| Derating                        | No derating                              |

**Standards and Specifications**

|                          |  |
|--------------------------|--|
| Conformity marking       | CE   |
| Standards/specifications | EN 61000-6-2<br>EN 61000-6-3<br>UL 508<br>UL 2367<br>DNV |

**Commercial data**

|                       |             |
|-----------------------|-------------|
| PU (SPU)              | 1 pcs       |
| Packaging type        | Box         |
| Country of origin     | DE          |
| Customs tariff number | 85362010900 |

**Product Classification**

|             |                      |
|-------------|----------------------|
| UNSPSC      | 39121601             |
| eCl@ss 10.0 | 27-37-18-02          |
| eCl@ss 9.0  | 27-37-18-02          |
| ETIM 9.0    | EC001440             |
| ETIM 10.0   | EC001440             |
| ECCN        | NO US CLASSIFICATION |

**Environmental Product Compliance**

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

**Approvals / Certificates**

**General approvals** **Declarations of conformity and manufacturer's declarations**



| Approval                             | Standard       | Certificate Name |
|--------------------------------------|----------------|------------------|
| EAC<br>GZO Almaty Standart           | TP TC 020/2011 | EAC CoC 03081    |
| UL<br>Underwriters Laboratories Inc. | UL 508         | E255817          |
| UR<br>Underwriters Laboratories Inc. | UL 2367        | E363438          |

| Approval  | Standard | Certificate Name |
|---|----------|------------------|
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                |

**Approvals for marine applications**



| Approval         | Standard | Certificate Name |
|------------------|----------|------------------|
| DNV<br>DNV GL SE | -        | TAA0000281       |

**Downloads**

**Environmental Product Compliance**

**Compliance Search**

|  |   |
|--|---|
| Environmental Product Compliance<br>787-1668/106-000 | ↓ |
|--|---|

**Documentation**

| Manual   |         |                   |   |
|--|---------|-------------------|---|
| Product Manual br/<br>Electronic Circuit Breaker | V 1.1.0 | pdf<br>1320.16 KB | ↓ |

| Bid Text         |            |                  |   |
|------------------|------------|------------------|---|
| 787-1668/106-000 | 03.07.2019 | xml<br>7.06 KB   | ↓ |
| 787-1668/106-000 | 03.07.2019 | docx<br>20.46 KB | ↓ |

**Instruction Leaflet**

|                              |                  |   |
|------------------------------|------------------|---|
| Elektronische Schutzschalter | pdf<br>409.78 KB | ↓ |
|------------------------------|------------------|---|

**CAD/CAE-Data**

| CAD data                         |   |
|----------------------------------|---|
| 2D/3D Models<br>787-1668/106-000 | ↓ |

| CAE data                              |   |
|---------------------------------------|---|
| EPLAN Data Portal<br>787-1668/106-000 | ↓ |
| WSCAD Universe<br>787-1668/106-000    | ↓ |
| ZUKEN Portal<br>787-1668/106-000      | ↓ |

**Libraries**

| Library                               |                     |                  |   |
|---------------------------------------|---------------------|------------------|---|
| Anbindung Stromversorgungen Serie 787 | 1.0.0<br>28.08.2017 | zip<br>340.24 KB | ↓ |
| Anbindung Stromversorgungen Serie 787 | 1.3.0<br>14.05.2014 | zip<br>549.48 KB | ↓ |

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marker



**Item No.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

**Item No.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

**Item No.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

**Item No.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white



**Item No.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

##### 1.1.1.2 Marking strip



**Item No.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

**Item No.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

**Item No.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

### 1.1.2 Mounting adapter

#### 1.1.2.1 DIN-rail adapter



**Item No.: 787-897/000-010**

Carrier rail adapter made of zinc die-cast; horizontal mounting of 787-16xx (TS35)

### 1.1.3 Tool

#### 1.1.3.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

**Item No.: 210-721**

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

**Item No.: 210-769**

SCREWDRIVER; green