

### Features

- OPTICLIP 600 4000K C8 WH SSA02 WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x52mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Connected capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3300lm luminous flux, 27W power consumption, 122lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

### Product Overview


Product name	OptiClip 600 4000K C8 WH SSA02 WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	122
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	78

Light your world


## OptiClip 600 4000K C8 WH SSA02 WHITE 0044003

<b>Glare control</b>	< 17
<b>Photobiological Risk Group</b>	RG1
<b>Total power consumption (W)</b>	27
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Dimmable</b>	Yes
<b>Minimum dimming level (%)</b>	1
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel
<b>IP rating</b>	IP40/20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5410288440033
<b>Warranty</b>	5 years
<b>Dimming method</b>	SylSmart SSA

### Photometry

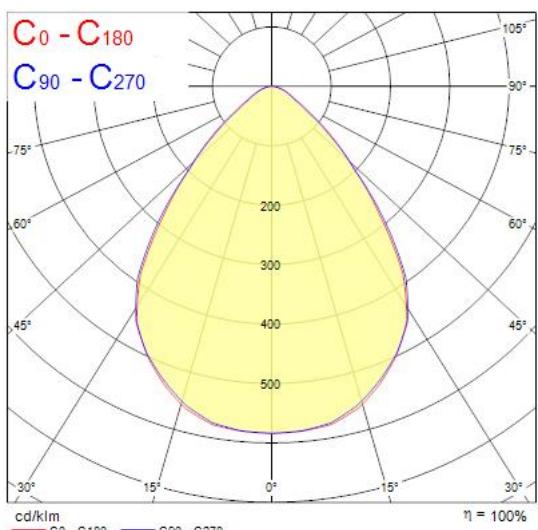

### Technical drawings

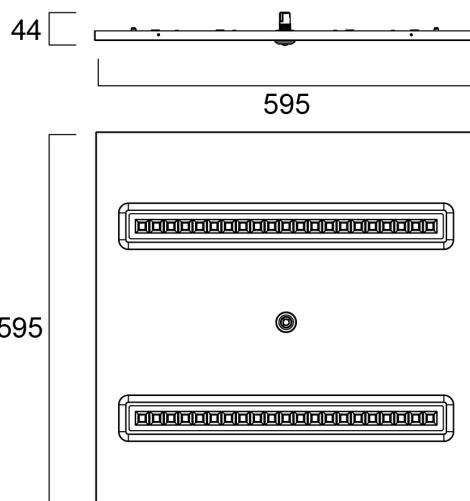

Light your world