


Glace
GLACE 1599LM HIGH OUTPUT 830 DALI
2059786



Product features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 1599lm, 20W, 80m/W, 3000K, 700mA, 85 CRI, DALI, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V

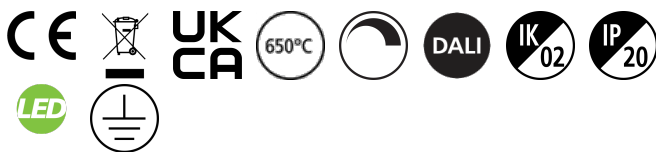


PRODUCT OVERVIEW

Product name	GLACE 1599LM HIGH OUTPUT 830 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Environment	Indoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4280805
Warranty	5 years
Luminous flux (lm)	1599
Luminaire efficacy (lm/W)	79.95
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 18
Total power consumption (W)	20
Electrical protection	Class I
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597864

PHOTOMETRY

Glace
GLACE 1599LM HIGH OUTPUT 830 DALI
2059786

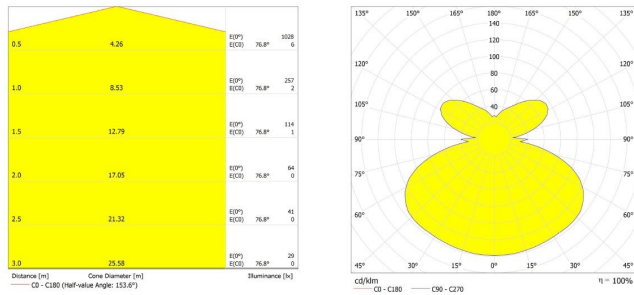

TECHNICAL DRAWINGS

