


# Concord

## CONCORD BEACON 4000K NARROW O/B DIM WHITE 2062453

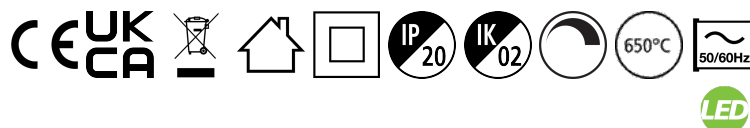

### Features

- Simple and slick integral design with no driver box and without any visible screws
- New technology utilization for improved performance
- Invisible in-track adaptor for an impressive architectural look
- Extremely precise light beams due to the high-quality lenses
- #80mm die-cast aluminium body, Fix beam angle: 19° , Textured white finishing colour
- Light color temperature: 4000K, natural light
- System power: 18W, Fixture lumen output: 1900lm, efficacy: 106lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
- Operating voltage 220-240V / 50-60Hz, dimmable via on-board potentiometer, Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack
- Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
- Horizontal rotation: 355°, vertical tilt: 90°
- Nominal product dimensions: D.80mmx200mm
- 5 years warranty. Suitable for track mounting

### Product Overview


Product name	CONCORD BEACON 4000K NARROW O/B DIM WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	106

# Concord

## CONCORD BEACON 4000K NARROW O/B DIM WHITE 2062453

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Beam Angle (°)	19
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768624539
Warranty	5 years
Dimming method	Onboard pot
Useful luminous flux (#use)	1850

### Photometry

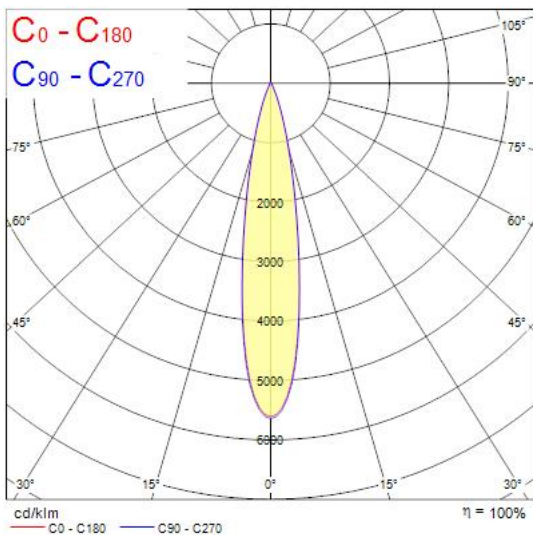

### Technical drawings

