


OptiClip 1200 4000K C8 WH SSC WHITE
0044006



Features

• OPTICLIP 1200 4000K C8 WH SSC WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, SylSmart Standalone capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3100lm luminous flux, 24W power consumption, 129lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.


Product Overview

Product name	OptiClip 1200 4000K C8 WH SSC WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	129
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	78
Glare control	< 19

OptiClip 1200 4000K C8 WH SSC WHITE
0044006

Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK07
Product EAN number	5410288440064
Warranty	5 years
Dimming method	SylSmart SSC

Photometry

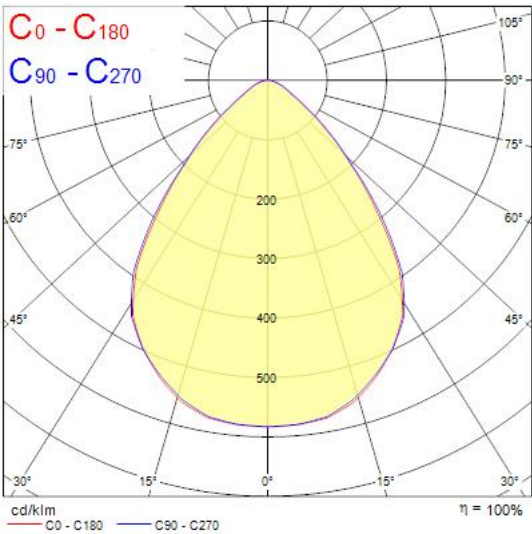

Technical drawings

