



Features

• Pixo Line is a linear track system, adds flexibility to any space due the variety of product optionsOffers an easy installation with two separate modulesPush-in/push-out mechanism with GR6d-15 connectorCompatible with Zhaga Book 14Aluminium body, plastic end caps,traslucent asymmetric optic diffuser, light beam angle:25° white finishing colour.Light color temperature: 4000K, max. system power: 50WMax. fixture lumen output: 7400lm, efficacy: 148lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiationMultipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA)Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrackElectrical protection: Class III. Degree of protection: IP20, suitable for indoor environment onlyLight modules should be combined with suitable in-track driversNominal product dimensions: L.1464mmx38.4mmx37mm


Product Overview

Product name	PIXO LINE 1500 ASYM R 840 WHITE
Technology	LED
Cap/Base	N/A
Mount	Track mounting
General application	Hospitality, Museums & Galleries, Office, Retail
ETIM Class	EC000996
Fixture luminous flux (lm)	7400


PIXO LINE 1500 ASYM R 840 WHITE 0007836

Luminaire efficacy (lm/W)	148
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	25
Beam Angle (°)	Single assymetric 25right
Photobiological Risk Group	Not applicable
Total power consumption (W)	50
Electrical protection	Class III
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288078366
Warranty	5 years
Dimming method	N/A


Photometry

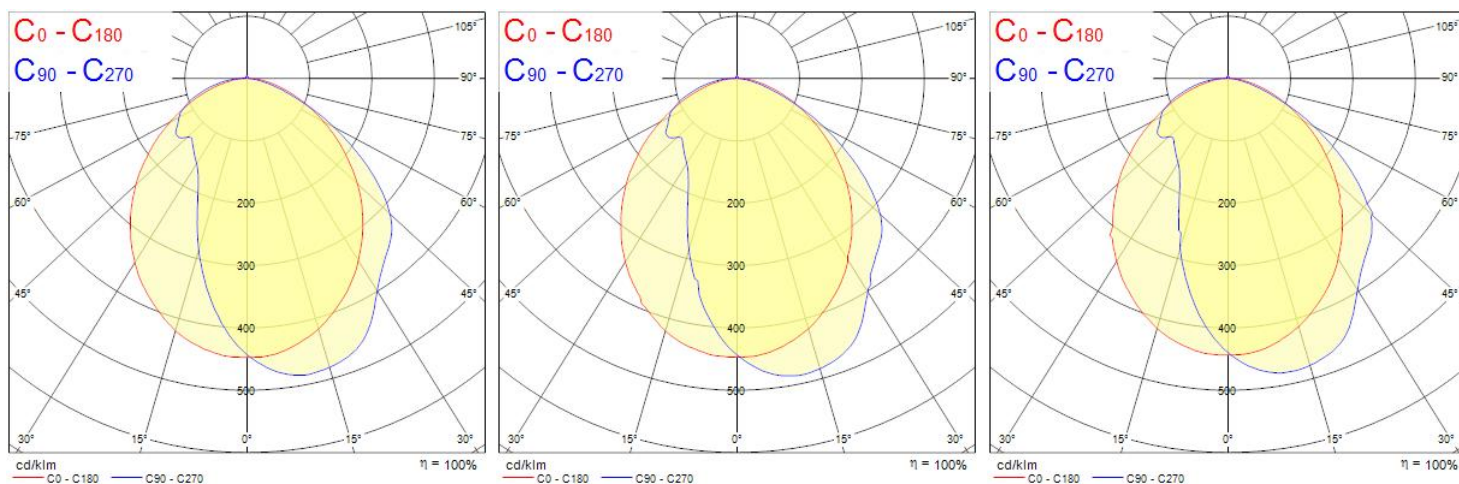


PIXO LINE 1500 ASYM R 840 WHITE
0007836

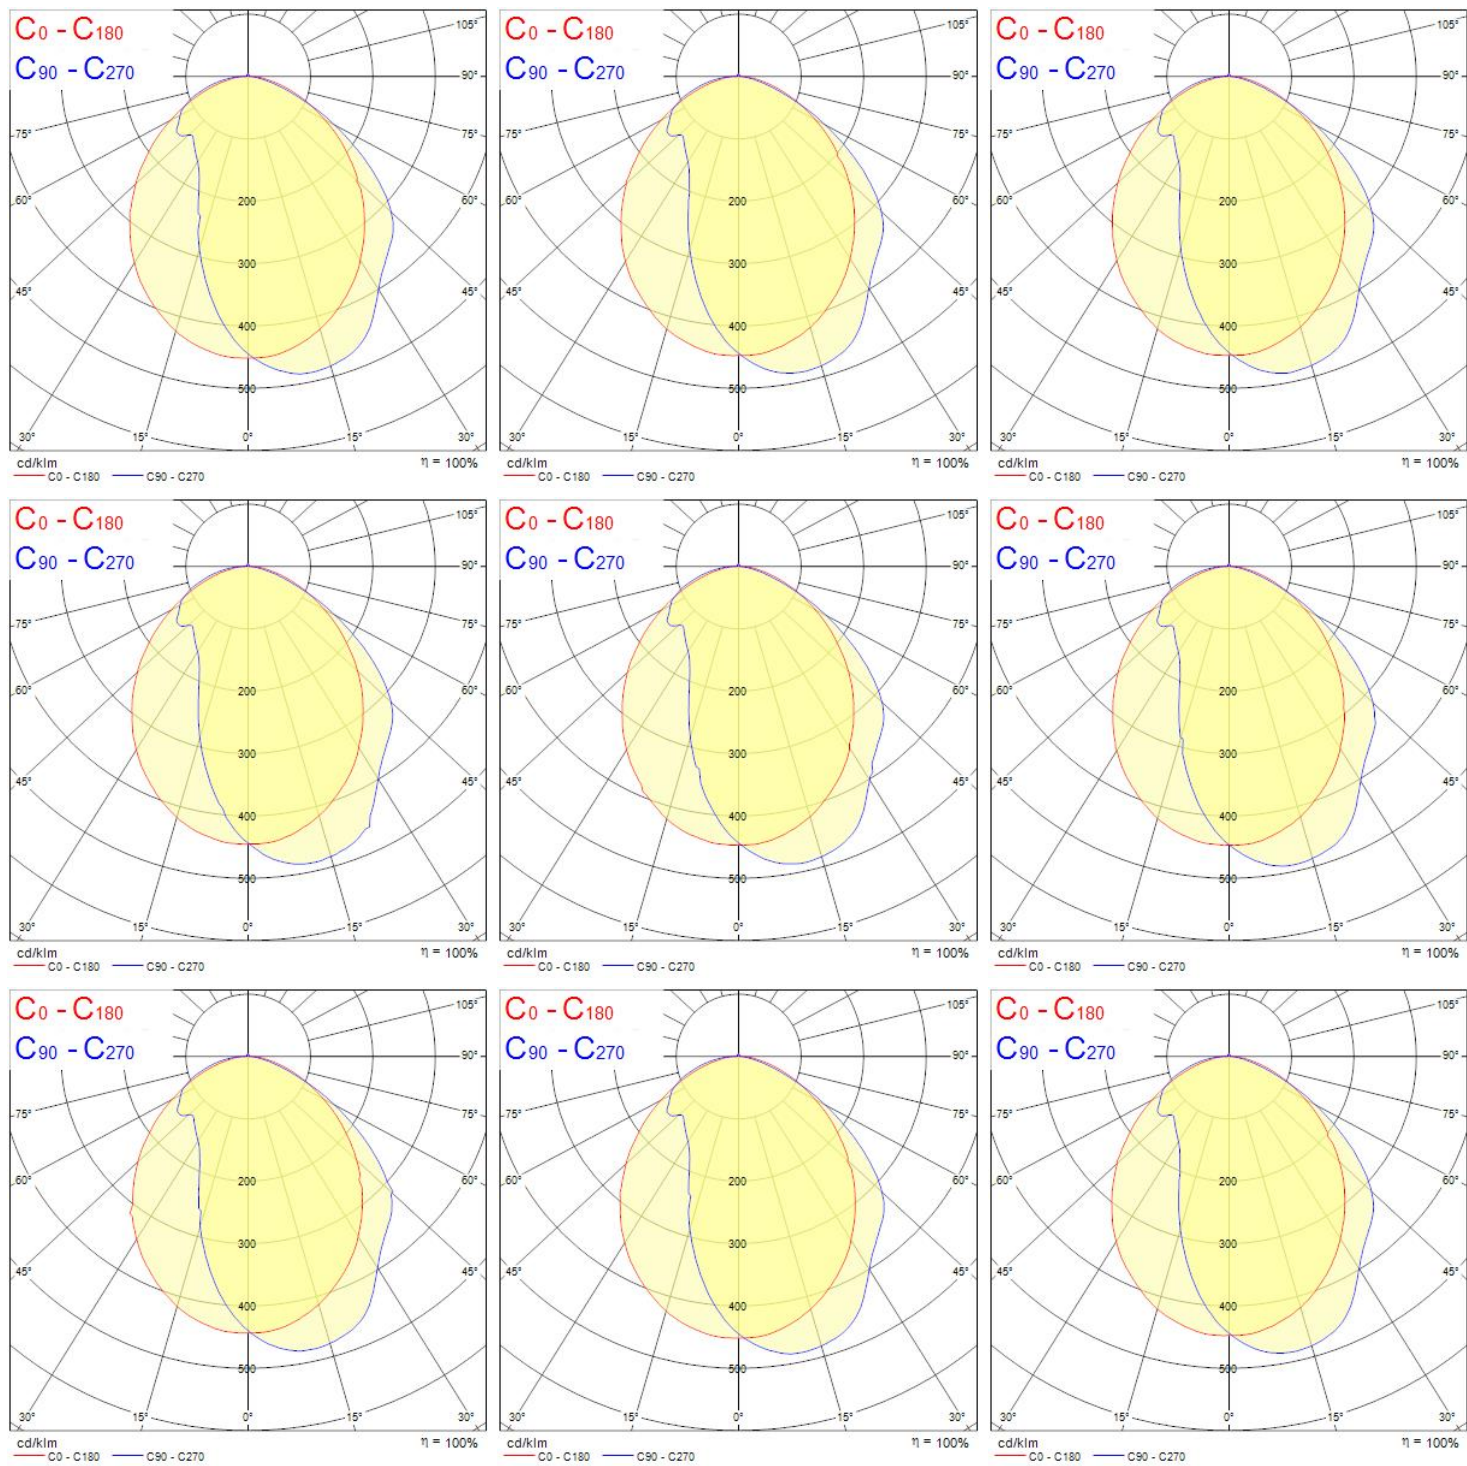

PIXO LINE 1500 ASYM R 840 WHITE
0007836

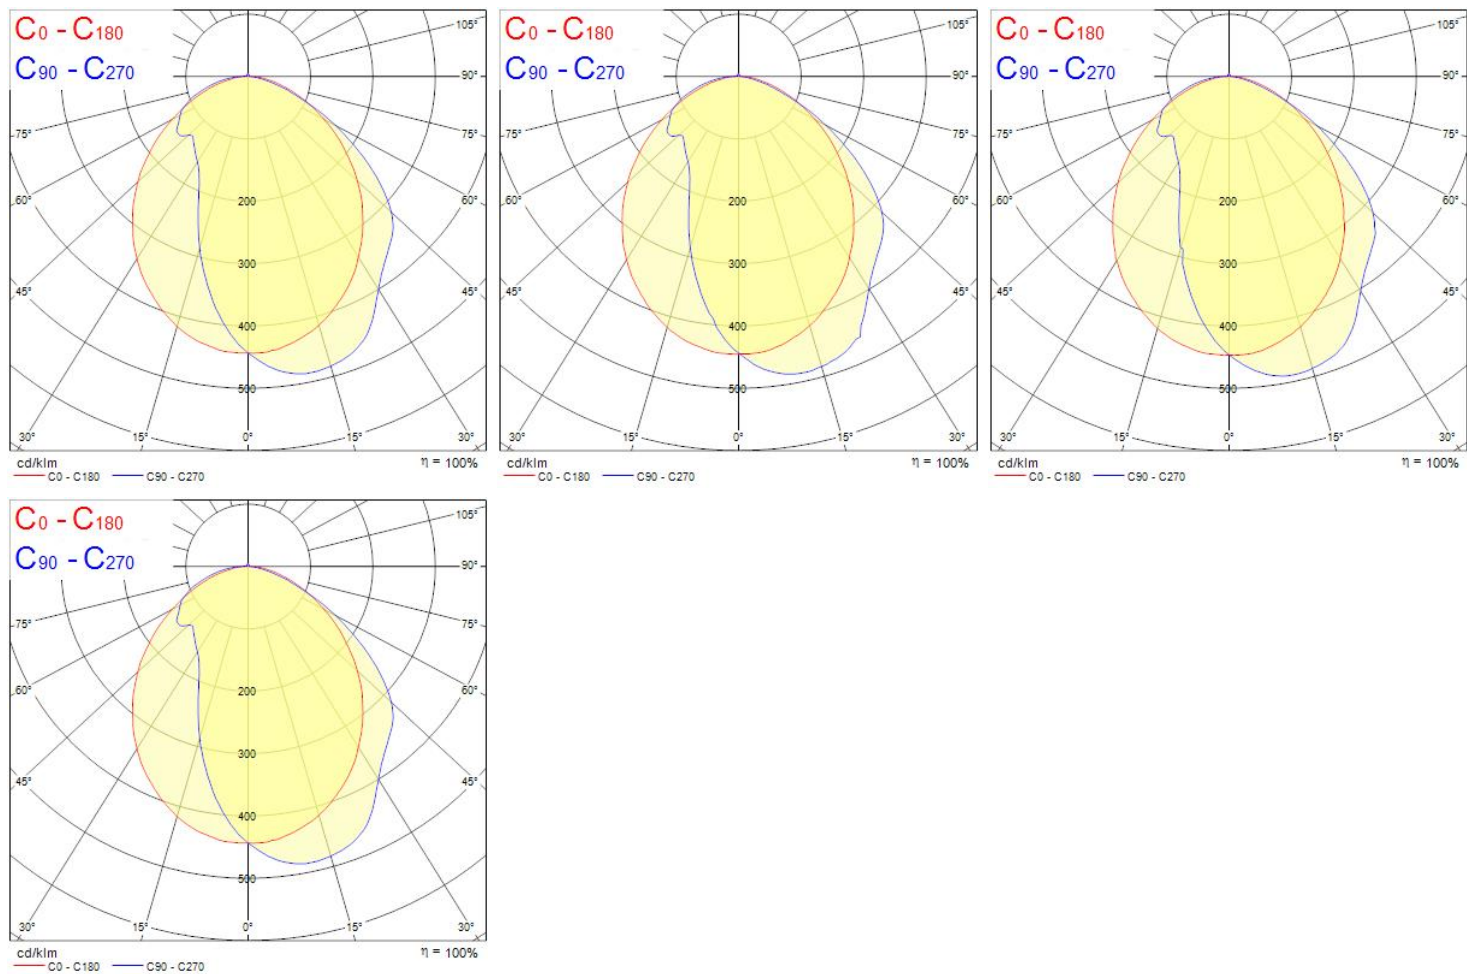

Technical drawings

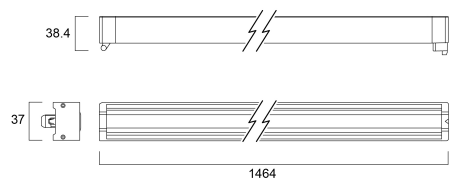

Data table

PIXO LINE 1500 ASYM R 840 WHITE 0007836

GENERAL DATA

Product name	PIXO LINE 1500 ASYM R 840 WHITE
Technology	LED
Cap/Base	N/A
Mount	Track mounting
General application	Hospitality, Museums & Galleries, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC000996
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	7400
Luminaire efficacy (lm/W)	148
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	25
Beam Angle (°)	Single assymetric 25right
Photobiological Risk Group	Not applicable

ELECTRICAL DATA

Total power consumption (W)	50
Electrical protection	Class III
Control gear required	No
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	N/A

LIFETIME DATA

Lifespan L70 B50	90000
------------------	-------

PIXO LINE 1500 ASYM R 840 WHITE 0007836

Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	90000
Lifespan L80 B20	79000
Lifespan L80 B10	76000
Lifespan L90 B50	43000
Lifespan L90 B20	37000
Lifespan L90 B10	36000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	1464
Nominal Product Width (mm)	37
Nominal Product Height (mm)	38.4
Weight (kg)	0.9

PACKAGING

Product EAN number	5410288078366
Packaging single length / height (cm)	147.0
Packaging single width (cm)	4.3
Packaging single depth (cm)	4.3
DUN14 (inner)	15410288078363
Units per outer package	10
Packaging outer length / height (cm)	149.0
Packaging outer width (cm)	24.0
Packaging outer depth (cm)	11.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No

SYLVANIA

PIXO LINE 1500 ASYM R 840 WHITE
0007836

Suitable for household illumination

No

Light your world