

Glace

GLACE 989LM HIGH EFFICIENCY 840
2059788



Product features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 989lm, 10W, 99m/W, 4000K, 500mA, 85 CRI, non-dimmable, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V




PRODUCT OVERVIEW

Product name	GLACE 989LM HIGH EFFICIENCY 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Environment	Indoor
General application	Hospitality
ETIM Class	EC002892
Warranty	5 years
Luminous flux (lm)	989
Luminaire efficacy (lm/W)	98.9
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 19
Total power consumption (W)	10
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597888


PHOTOMETRY

Glacé

GLACE 989LM HIGH EFFICIENCY 840
2059788

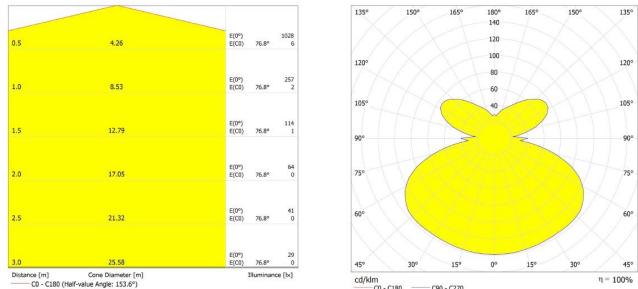

TECHNICAL DRAWINGS



400



54