

Product data sheet Spirotech

Product name

SpiroTop Solar -1/2" -AutoClose

Product properties

A brass automatic air vent - AutoClose for solar systems with a 1/2" connection

- Specially developed for Solar (high temperature) installations
- Applicable with max. 20% - 50% Ethylene Glycol and water (Volume)
- Removes circulating and trapped air
- Greatly reduces commissioning times
- Minimal constant pressure drop
- No unnecessary shutdown
- Long lasting valve seat
- Connection diameters 1/2"
- Prevents stagnation
- Solar fluid will not prematurely degenerate
- System will not boil dry via the air vent
- No more climbing the roof to remove free air
- Permanent air-free, efficient installation
- Suitable for new and existing installations


Article number

AB050FBA08

Product image



Product dimensions

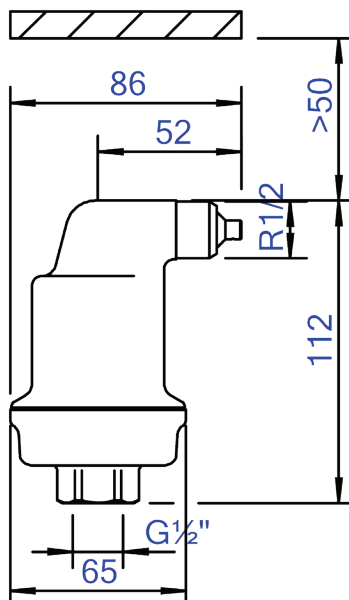

Product data sheet Spirotech

ETIM product data

Height	112 mm
Housing material	Brass
With leakage protection	Yes
With air intake barrier	No
Angle connection	No
Nominal diameter	1/2 inch (15)

Material float	Fluorelastomer rubber (FPM/FKM)
Max. medium temperature (continuous)	180 °C
Surface protection	Untreated
Lockable	No
Connection 1	Internal thread cylindrical BSPP-G (ISO 228-1)
Max. operating pressure at 20 °C	10 bar

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

