

Beacon LED XXL

BEACON XXL MB O/B DIM 3K L3 WHT

2093007



Product features

- 2093007 BEACON XXL MB O/B DIM 3K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 3670lm, luminaire efficacy: 76lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, dimmable, on-board potentiometer for dimming control, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, dimensions Ø113x168x205mm




PRODUCT OVERVIEW

Product name	BEACON XXL MB O/B DIM 3K L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
ETIM Class	EC001744
E-number FI	4278681
E-number SE	7401083
Warranty	5 years
Useful luminous flux (Fuse)	3670
Fixture luminous flux (lm)	3670
Luminaire efficacy (lm/W)	76.46
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Housing colour	White
IP rating	IP20
Product EAN number	5025768930074

Beacon LED XXL

BEACON XXL MB O/B DIM 3K L3 WHT
2093007

PHOTOMETRY

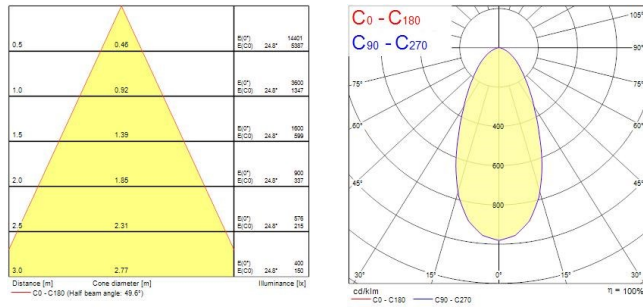

TECHNICAL DRAWINGS

