



Features

- Integrated LED highbay; Black aluminium housing; 26000Lm; 180 W; 144 Lm/W; 4000K; Drive current: 750mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 385 x 181 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.


Product Overview

Product name	Granit IP65 0-10V 26000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357007
Fixture luminous flux (lm)	26000
Luminaire efficacy (lm/W)	144
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	85
Glare control	< 25

Granit IP65 0-10V 26000lm 840 WB 0039597

Photobiological Risk Group	RG1
Total power consumption (W)	180
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288395975
Warranty	5 years
Dimming method	0-10V

Photometry

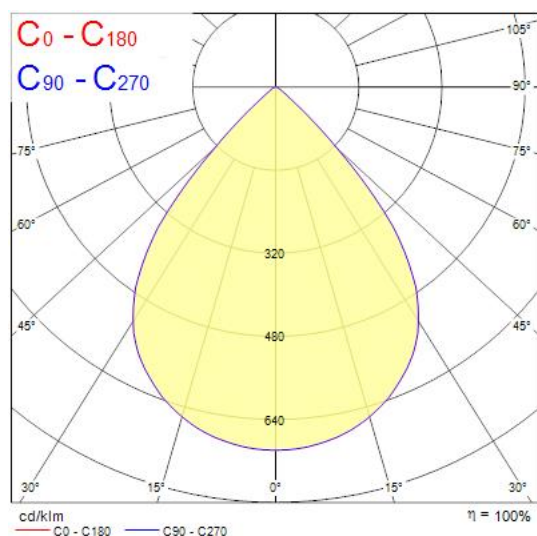

Technical drawings

