

Data Sheet | Item Number: 286-721



Optocoupler module; Nominal input voltage: 24 VDC; Output voltage range: 15 ... 30 VDC; Limiting continuous current: 5 A; 3-wire connection/low-side switching; Red status indicator; Module width: 15 mm; gray

<https://www.wago.com/286-721>



Color: ■ gray

Similar to illustration

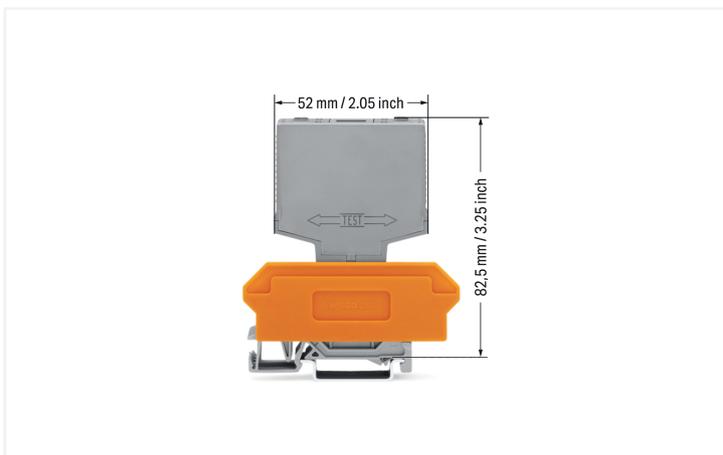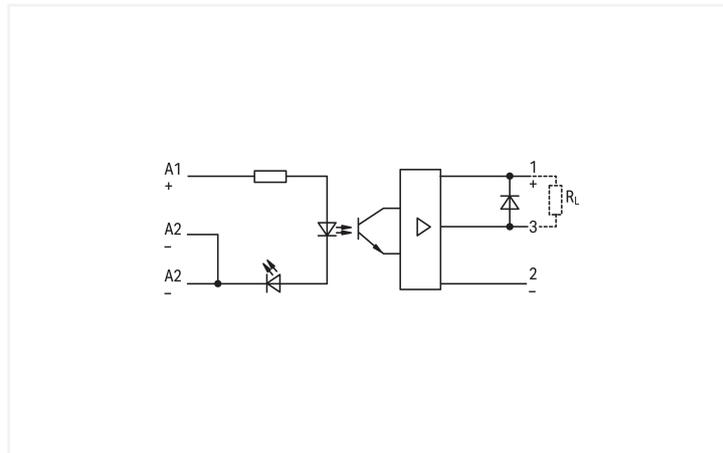

Technical data

Control circuit

Nominal input voltage U_N	24 VDC
Input voltage range (high level)	15 ... 30 VDC
Nominal input current at U_N	14 mA
Input current range	7.5 ... 18 mA

Load circuit

Circuit type	3-wire connection Low-side switching
Limiting continuous current	5 A
Nominal output voltage	24 VDC
Output voltage range	15 ... 40 VDC
Voltage drop	≤ 0.5 VDC
Leakage current at rated voltage	≤ 2 μ A
Turn-on time	≤ 20 μ s
Turn-off time	≤ 80 μ s
Switching frequency	≤ 1 kHz

Signaling

Status indicator	Red LED
------------------	---------

Safety and protection

Pollution degree	2
Dielectric strength (control/load circuit) (AC, 1 min)	2.5 kVrms
Protection type	IP20

Physical data

Width	15 mm / 0.591 inches
Height	52 mm / 2.047 inches
Depth from upper-edge of DIN-rail	82.5 mm / 3.25 inches
Note (dimensions)	Depth including carrier terminal block

Mechanical data

Mounting type	Pluggable module for receptacle terminal blocks
---------------	---

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	5.743 MJ
Weight	29.2 g

Environmental requirements

Ambient temperature (operation at U_N)	-25 ... +40 °C
Ambient temperature (storage)	-25 ... +40 °C
Processing temperature	-25 ... +50 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and Specifications

Standards/specifications	EN 60664-1
--------------------------	------------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332157735
Customs tariff number	85365005000

Product Classification

UNSPSC	39121521
eCl@ss 10.0	27-26-15-03
eCl@ss 9.0	27-26-15-03
ETIM 9.0	EC001504
ETIM 10.0	EC001504
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

CAS-No.	1303-86-2 1317-36-8 7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	0a938584-bc3f-4ca5-a92f-aed2344a0a26
SCIP notification number (Belgium)	98bb301d-154e-490a-992e-c2ecf03ea911
SCIP notification number (Bulgaria)	ce6e921f-6b20-4b1e-8ad1-7d1bd4e8bae6
SCIP notification number (Czech Republic)	fa6a524d-58c1-43fd-bdf6-4b26cb46b0ee
SCIP notification number (Denmark)	82b8c314-06a3-4e05-9ef3-8cd1d941caa2
SCIP notification number (Finland)	e023aa72-65b1-4809-9a0e-b31566b4d683
SCIP notification number (France)	10b9dcbc-5a2e-48f1-957b-cc4bf11548b9
SCIP notification number (Germany)	50e69804-47ed-4f8f-9bcf-8c731491a660
SCIP notification number (Hungary)	b9a282fb-dd0c-4623-8459-65fde7ac2910
SCIP notification number (Italy)	cdebb324-03b1-443b-9d34-638624684b2e
SCIP notification number (Netherlands)	fb9449cb-2b27-422d-b548-d52c447936b8
SCIP notification number (Poland)	3253dd11-36fa-4ceb-b09e-8e66674461d6
SCIP notification number (Romania)	f4e40732-ec6b-47f7-ad85-6bc7c9994c73
SCIP notification number (Sweden)	4fdbf1f5-0f88-4dd6-9fa7-6b1fe961a1ac

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 286-721			↓

Documentation

Bid Text			
286-721	20.02.2019	docx 15.27 KB	↓
286-721	19.02.2019	xml 3.72 KB	↓

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	↓

CAD/CAE-Data

CAE data	
WSCAD Universe 286-721	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marker



Item No.: 209-701
 WSB marking card; as card; not stretchable; plain; snap-on type; white

1.1.2 Terminal blocks

1.1.2.1 Terminal block for pluggable modules



Item No.: 280-619
 Terminal block for pluggable modules; 6-pole; with 2-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray



Item No.: 280-763
 Terminal block for pluggable modules; 6-pole; with 4-conductor terminal blocks; with marker carrier; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray



Item No.: 280-609
 Terminal block for pluggable modules; 6-pole; with 4-conductor terminal blocks; with orange separator; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

Installation Notes

Installation



Coding ensures correct polarity.



Pluggable electronic modules on 2- or 4-conductor carrier terminal blocks

Marking



Marking via WMB Multi Marking System.

Testing



Function testing via touch-proof test slots